

09/22/00
JC920 U.S. PTO

09-25-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

DOCKET NUMBER	ANTICIPATED CLASSIFICATION OF THIS APPLICATION:		PRIOR APPLICATION	
	CLASS	SUBCLASS	EXAMINER	ART UNIT
12008.6USC6	435	014.000	L. LEARY	1623

09/22/00
JC920 U.S. PTO
166821

CERTIFICATE UNDER 37 CFR 1.10.

"Express Mail" mailing label number EL674895807US
Date of Deposit September 22, 2000

I hereby certify that this paper or fee is being deposited with the U S Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Assistant Commissioner for Patents, Washington, D C 20231.

By: Nakia White
Name: Nakia White

CONTINUATION APPLICATION UNDER 37 C.F.R. § 1.53(b)

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231

Dear Sir:

This is a request for filing a continuation application under 37 CFR § 1.53(b) of Serial No. 09/477,053, filed on January 3, 2000 entitled SUBCUTANEOUS GLUCOSE ELECTRODE by the following inventor(s):

Full Name Of Inventor	Family Name HELLER	First Given Name ADAM	Second Given Name
Residence & Citizenship	City AUSTIN	State or Foreign Country TEXAS	Country of Citizenship USA
Post Office Address	Post Office Address 5317 VALBURN CIRCLE	City AUSTIN	State & Zip Code/Country TEXAS 78731/USA
Full Name Of Inventor	Family Name PISHKO	First Given Name MICHAEL	Second Given Name V.
Residence & Citizenship	City AUSTIN	State or Foreign Country TEXAS	Country of Citizenship USA
Post Office Address	Post Office Address 4304C DUVAL ROAD	City AUSTIN	State & Zip Code/Country TEXAS 78759/USA

- ☒ Enclosed is a copy of the prior application; including the specification, claims, drawings, oath or declaration showing the applicant's signature, and any amendments referred to in the oath or declaration filed to complete the prior application. (It is noted that no amendments referred to in the oath or declaration filed to complete the prior application introduced new matter therein.) The continuing application is as follows: 33 pages of specification, 30 claims, 1 pages of abstract, 10 sheets of drawings, and 2 pages of oath or declaration.
- ☒ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
- ☒ Cancel original claims 2-30 of this application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☒ The filing fee is calculated below:

CLAIMS AS FILED

NUMBER FILED	NUMBER EXTRA		RATE	FEE
TOTAL CLAIMS: 48 -20	28	x	\$18.00	504.00
INDEPENDENT CLAIMS 7 -3	4	x	\$78.00	312.00
			BASIC FILING FEE:	\$690.00
			TOTAL FILING FEE:	1,506.00

☐ A Verified Statement that this filing is by a small entity is already filed in the prior application.

☐ A Verified Statement that this filing is by a small entity is attached.

4. ☒ Payment of fees:

☒ Attached is a check in the amount of \$1,506.00

☐ Please charge Deposit Account No. 13-2725.

☒ The Commissioner is hereby authorized to charge any additional fees as set forth in 37 CFR §§ 1.16 to 1.18 which may be required by this paper or credit any overpayment to Account No. 13-2725.

☒ Amend the specification by inserting before the first line the sentence:

"This application is a Continuation of application Serial No. 09/477,053, filed January 3, 2000, which is a Continuation of application Serial No. 09/356,102, filed July 16, 1999, which is a Continuation of application Serial No. 08/767,110, filed December 4, 1996, which is a continuation of application Serial No. 08/299,526, filed September 1, 1994, now U.S. Patent No. 5,593,852, which application(s) are incorporated herein by reference."

☒ A set of formal drawings (10 sheets) is enclosed.

8. ☐ Priority of application Serial No. , filed on in , is claimed under 35 U.S.C. 119.

☐ The certified copy has been filed in prior application Serial No. , filed .

9. ☒ The prior application is assigned of record to E. Heller & Company located at Alameda, California.

10. ☒ The Power of Attorney in the prior application is to:

Merchant & Gould P.C.
Minneapolis, MN 55402-2215

11. ☒ A preliminary amendment is enclosed. (Claims added by this amendment have been properly numbered consecutively beginning with the number next following the highest numbered original claim in the prior application.)

☒ Fee for excess claims is attached.


12. ☐ A petition and fee has been filed to extend the term in the prior application until . A copy of the petition for extension of time in the prior application is attached.
13. ☐ The inventor(s) in this application are less than those named in the prior application and it is requested that the following inventors identified above for the prior application be deleted:
14. ☐ Also Enclosed:
15. ☒ Address all future communications to the **Attention of Tong Wu** (may only be completed by attorney or agent of record) at the address below.
16. ☒ A return postcard is enclosed.

Respectfully submitted,

MERCHANT & GOULD P.C.
P.O. Box 2903
Minneapolis, MN 55402-0903
612.332.5300



Date: Sep. 22, 2000



Tong Wu
Reg. No. 43,361
TW:PSTljj

S/N NEW FILING

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	HELLER ET AL.	Examiner:	UNKNOWN
Serial No.:	NEW FILING	Group Art Unit:	UNKNOWN
Filed:	HEREWITH	Docket No.:	12008.6USC6
Title:	SUBCUTANEOUS GLUCOSE ELECTRODE		

CERTIFICATE UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL674895807US

Date of Deposit: September 22, 2000

I hereby certify that this correspondence is being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

By:

Name:

Nakia White
Nakia White

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:



Please enter the following Preliminary Amendment before examination of the above-identified patent application.

In the Claims

Please cancel claim 1.

Please add new claims 31-78 as follows.

31. (New) A flexible analyte sensor comprising:
- a portion of the sensor that is adapted for positioning external to the animal and for connection to a device for measurement of the electrical signal generated by the sensor;
 - a portion of the sensor that is adapted for subcutaneous implantation in an animal, comprising:
 - at least one non-corroding, analyte-responsive working electrode; and
 - a sensing layer coupled to the working electrode;

wherein the sensor is flexible and is adapted to provide an electrical signal that is substantially insensitive to relative motion between the implanted portion of the sensor and tissue surrounding the implanted portion of the sensor.

32. (New) The analyte sensor of claim 31, wherein the analyte is glucose.

33. (New) The analyte sensor of claim 31, wherein the sensing layer comprises a non-leachable, analyte-responsive enzyme.

34. (New) The analyte sensor of claim 33, wherein the sensing layer further comprises a hydrogel.

35. (New) The analyte sensor of claim 33, wherein the sensing layer further comprises a non-leachable redox compound.

36. (New) The analyte sensor of claim 31, wherein the sensor has no leachable components.

37. (New) The analyte sensor of claim 32, further comprising a diffusion-limiting layer disposed over the sensing layer.

38. (New) The analyte sensor of claim 37, wherein the diffusion-limiting layer is adapted to limit the rate of glucose transport to the sensing layer to be substantially lower than the rate of glucose transport to the tissue surrounding the sensor.

39. (New) The analyte sensor of claim 37, further comprising a biocompatible layer disposed over the diffusion-limiting layer.

40. (New) The analyte sensor of claim 39, wherein the biocompatible layer comprises poly(ethylene oxide).

41. (New) The analyte sensor of claim 32, wherein the working electrode has a width of no more than about 0.25 mm.

42. (New) The analyte sensor of claim 32, wherein the portion of the sensor that is adapted for subcutaneous implantation has a width of no more than about 0.29 mm.

43. (New) The analyte sensor of claim 32, wherein the working electrode is adapted to provide a signal of current density of at least about $69 \mu\text{A}/\text{cm}^2$ at 37°C at a glucose concentration of 10 mM.

44. (New) The analyte sensor of claim 32, wherein the sensor is adapted to have a 10 to 90% response time of not more than about 30 seconds at a glucose concentration of about 20 mM.

45. (New) The analyte sensor of claim 32, wherein the sensor is adapted to provide a current signal deviating not more than about 5% from its average value for at least 72 hours after equilibration when glucose concentration is maintained at 10 mM.

46. (New) The analyte sensor of claim 32, wherein the glucose response through the 2 to 20 mM glucose concentration range is close to linear.

47. (New) The analyte sensor of claim 46, wherein the sensor has substantially no signal output when the concentration of glucose is zero.

48. (New) A glucose measurement system comprising:
a sensor configured to generate a signal indicative of the glucose concentration, the sensor comprising:
a non-corroding working electrode adapted for subcutaneous implantation in an animal, and
a sensing layer comprising a non-leachable glucose-responsive enzyme disposed on the working electrode; and

a signal measuring device operatively connected to the sensor for measuring the signal generated by the sensor, the signal measuring device being configured to allow the signal generated by the sensor to reach a basal signal level for a predetermined period of time before the signal is used as an indicator of the glucose concentration.

49. (New) The glucose measurement system of claim 48, wherein the working electrode has a width of no more than about 0.25 mm.

50. (New) The glucose measurement system of claim 48, wherein the sensor has a width of no more than about 0.29 mm.

51. (New) The glucose measurement system of claim 48, wherein the working electrode is adapted to provide a signal of current density of at least about $69 \mu\text{A}/\text{cm}^2$ at 37°C at a glucose concentration of 10 mM.

52. (New) The glucose measurement system of claim 48, further comprising a diffusion-limiting layer disposed over the sensing layer.

53. (New) The glucose measurement system of claim 48, wherein the sensor is adapted to have a 10 to 90% response time of not more than about 30 seconds at a glucose concentration of about 20 mM.

54. (New) The glucose measurement system of claim 48, wherein the sensor is a glucose sensor and is adapted to provide a current signal deviating not more than about 5% from its average value for at least 72 hours after equilibration when glucose concentration is maintained at 10 mM.

55. (New) An introduction system for a glucose sensor, comprising:
an introducer adapted for subcutaneous placement of a portion of a flexible glucose sensor in an animal, and

a portion of a flexible glucose sensor carried within the sensor introducer, the portion of a flexible glucose sensor comprising:

a non-corroding working electrode adapted for subcutaneous implantation in an animal, and

a sensing layer comprising a non-leachable, glucose-responsive enzyme disposed on the working electrode;

wherein the introducer can be withdrawn from the animal while leaving the portion of a flexible glucose sensor implanted within the subcutaneous tissue of the animal.

56. (New) The introduction system of claim 55, wherein the introducer is adapted to aid insertion of the sensor into the abdomen of the animal.

57. (New) The introduction system of claim 55, wherein the working electrode has a width of no more than about 0.25 mm.

58. (New) The introduction system of claim 55, wherein the portion of the flexible glucose sensor carried within the sensor introducer has a width of no more than about 0.29 mm.

59. (New) A method of measuring the concentration of glucose in an animal tissue, the method comprising the steps of:

(a) implanting into the animal a flexible sensor configured to generate a signal indicative of the concentration of glucose, the sensor comprising:

a non-corroding working electrode adapted for subcutaneous implantation in an animal; and

a sensing layer comprising a non-leachable glucose-responsive enzyme disposed on the working electrode;

(b) connecting a signal measuring device to the sensor;

(c) allowing the signal generated by the sensor to reach a basal signal level for a predetermined period of time; and

(d) measuring the glucose concentration using the signal generated by the sensor after step (c).

60. (New) A method of measuring the concentration of glucose in an animal tissue, the method comprising the steps of:

(a) subcutaneously implanting into the animal a flexible sensor configured to generate a signal indicative of the glucose concentration, the sensor comprising:

a non-corroding working electrode adapted for subcutaneous implantation in an animal,

a sensing layer comprising a non-leachable glucose-responsive enzyme disposed on the working electrode, and

a glucose diffusion-limiting layer disposed on the sensing layer;

(b) allowing the glucose to reach the working electrode; and

(c) limiting the rate of glucose transport to the sensing layer to a level substantially lower than the rate of glucose transport to the tissue surrounding the sensor.

61. (New) A method for inserting a flexible glucose sensor, comprising:

(a) providing an introducer having a width of not more than about 22 gauge adapted for subcutaneous placement of a portion of a flexible, glucose sensor in an animal;

(b) placing within the introducer a portion of a flexible, glucose sensor, the portion of a flexible, glucose sensor comprising:

a non-corroding working electrode adapted for subcutaneous implantation in an animal, and

a sensing layer comprising a non-leachable, glucose-responsive enzyme disposed on the working electrode;

(c) inserting the introducer into the animal so that the portion of the flexible, glucose sensor is carried into the subcutaneous tissue;

(d) withdrawing the introducer from the animal while leaving the portion of a flexible glucose sensor implanted within the subcutaneous tissue of the animal; and

(e) connecting a signal measuring device to a portion of the sensor exterior to the animal.

62. (New) The method of claim 61, wherein the working electrode has a width of no more than about 0.25 mm.

63. (New) The method of claim 61, wherein the portion of the flexible glucose sensor implanted within the subcutaneous tissue of the animal has a width of no more than 0.29 mm.

64. (New) A flexible glucose sensor comprising:
a portion of the sensor that is adapted for positioning external to the animal and for electrical contact with a device for measurement of the electrical signal generated by the sensor;
a portion of the sensor that is adapted for subcutaneous implantation in an animal, comprising:
at least one non-corroding, glucose-responsive working electrode; and
a sensing layer coupled to the working electrode;
wherein the sensor is flexible and the width of the portion of the sensor that is adapted for subcutaneous implantation is less than about 0.29 mm.

65. (New) The flexible glucose sensor of claim 64, wherein the sensing layer comprises a non-leachable, analyte-responsive enzyme.

66. (New) The flexible glucose sensor of claim 65, wherein the sensing layer further comprises a hydrogel.

67. (New) The flexible glucose sensor of claim 65, wherein the sensing layer further comprises a non-leachable redox compound.

68. (New) The flexible glucose sensor of claim 64, wherein the sensor has no leachable components.

69. (New) The flexible glucose sensor of claim 64, further comprising a diffusion-limiting layer disposed over the sensing layer.

70. (New) The flexible glucose sensor of claim 69, wherein the diffusion-limiting layer is adapted to limit the rate of glucose transport to the sensing layer to be substantially lower than the rate of glucose transport to the tissue surrounding the sensor.

71. (New) The flexible glucose sensor of claim 69, further comprising a biocompatible layer disposed over the diffusion-limiting layer.

72. (New) The flexible glucose sensor of claim 69, wherein the biocompatible layer comprises poly (ethylene oxide).

73. (New) The flexible glucose sensor of claim 64, wherein the working electrode has a width of no more than about 0.25 mm.

74. (New) The flexible glucose sensor of claim 64, wherein the working electrode is adapted to provide a signal of current density of at least about $69 \mu\text{A}/\text{cm}^2$ at 37°C at a glucose concentration of 10 mM.

75. (New) The flexible glucose sensor of claim 64, wherein the sensor is adapted to have a 10 to 90% response time of not more than about 30 seconds at a glucose concentration of about 20 mM.

76. (New) The flexible glucose sensor of claim 64, wherein the sensor is adapted to provide a current signal deviating not more than about 5% from its average value for at least 72 hours after equilibration when glucose concentration is maintained at 10 mM.

77. (New) The flexible glucose sensor of claim 64, wherein the glucose response through the 2 to 20 mM glucose concentration range is close to linear.

78. (New) The flexible glucose sensor of claim 64, wherein the sensor has substantially no signal output when the concentration of glucose is zero.


REMARKS

Claims 31-78 are now pending in this application. Consideration and examination is respectfully requested.

Respectfully submitted,

MERCHANT & GOULD P.C.
P.O. Box 2903
Minneapolis, Minnesota 55402-0903
(612) 332-5300

Date: Sep. 22, 2000

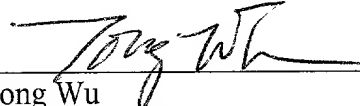

Tong Wu
Reg. No. 43,361
TW:PSTljj

INVENTOR: ADAM HELLER
MICHAEL V. PISHKO

TITLE: SUBCUTANEOUS GLUCOSE ELECTRODE

This is a continuation in part of copending U.S. Patent Application Serial Number 08/161,682 which is hereby incorporated by reference for all purposes.

This work was supported in part by the National
5 Institutes of Health (DK42015). Accordingly, the U.S. government may have rights in this invention.

FIELD OF THE INVENTION

10 The present invention relates to *in vivo* enzyme biosensors and more specifically to miniature glucose sensors for subcutaneous measurement of glucose with one-point calibration.

BACKGROUND

15 In response to the need for frequent or continuous *in vivo* monitoring of glucose in diabetics, particularly in brittle diabetes, a range of possible *in vivo* glucose electrodes have been studied. The desired characteristics of these electrodes include
20 safety, clinical accuracy and reliability, feasibility of *in vivo* recalibration, stability for at least one hospital shift of eight hours, small size, ease of insertion and removal, and a sufficiently fast response to allow timely intervention. The *in vivo*
25 recalibration should be based upon withdrawal of a single sample of body fluid, e.g., blood, and measuring its glucose concentration. This is termed "one point calibration".

Keys to safety are absence of leachable components, biocompatibility, and limiting of the potentially hazardous foreign matter introduced into the body to an amount that is inconsequential in a worst case failure. The clinical accuracy must be such that even when the readings are least accurate, the clinical decisions based on these be still correct. Feasibility of prompt confirmation of proper functioning of the sensors and of periodic in vivo recalibration is of essence if a physician is to allow the treatment of a patient to depend on the readings of the sensor. This one-point calibration, relying on the signal at zero glucose concentration being zero and measuring the blood glucose concentration at one point in time, along with the signal, is of essence, but has heretofore been elusive. The sensitivity must be sufficiently stable for the frequency of required in vivo recalibration to not be excessive. The sensor must be small enough to be introduced and removed with minimal discomfort to the patient and for minimal tissue damage. It is preferred that the sensor be subcutaneous and that it be inserted and removed by the patient or by staff in a physician's office. Finally, its response time must be fast enough so that corrective measures, when needed, can be timely.

In response to some of these needs, needle type and other subcutaneous amperometric sensors were considered. The majority of these utilized platinum-iridium, or platinum black to electrooxidize H_2O_2 generated by the glucose oxidase (GOX) catalyzed reaction of glucose and oxygen. In these sensors, the GOX was usually in large excess and immobilized, often by crosslinking with albumin and glutaraldehyde. To exclude electrooxidizable interferants, membranes of

cellulose acetate and sulfonated polymers including Nafion[®] were used. Particular attention was paid to the exclusion of the most common electrooxidizable interferants: ascorbate, urate and acetaminophen. Also to cope with the interferants, two-electrode differential measurements were used, one electrode being sensitive to glucose and electrooxidizable interferants and the other only to interferants. One strategy for overcoming the problem of interferants, applicable also to the present invention, involves their preoxidation. Another strategy involves shifting, through chemical changes, the redox potential of the polymer in the sensing layer to more reducing potentials. When the redox potential of the polymer is in the region between about - 0.15 V and +0.15 V versus the standard calomel electrode (SCE), and the electrodes are poised in their *in vivo* operation between about - 0.10 and + 0.25 V, the rate of electrooxidation of interferants such as ascorbate, urate, and acetaminophen is very slow relative to that of glucose through its physiological concentration range. Thus, also the currents from electrooxidation of interferants are small relative to those of glucose.

To make the electrodes more biocompatible, hydrophilic polyurethanes, poly(vinyl alcohol) and polyHEMA membranes have been used.

Several researchers tested GOX-based glucose sensors *in vivo* and obtained acceptable results in rats, rabbits, dogs, pigs, sheep and humans. These studies validated the subcutaneous tissue as an acceptable glucose sensing site. Good correlation was observed between intravascular and subcutaneous glucose concentrations. They also demonstrated the need for *in vivo* sensor calibration. Another approach to *in vivo*

glucose monitoring was based on coupling subcutaneous microdialysis with electrochemical detection. To control and adjust the linear response range, electrodes have been made glucose-diffusion limited, usually through glucose transport limiting membranes.

Diffusional mediators, through which the O_2 partial pressure dependence of the signals is reduced, are leached from sensors. Such leaching introduces an unwanted chemical into the body, and also leads to loss in sensitivity, particularly in small sensors. In microsensors, in which outward diffusion of the mediator is radial, the decline in sensitivity is rapid. This problem has been overcome in "wired" enzyme electrodes, i.e., electrodes made by connecting enzymes to electrodes through crosslinked electron-conducting redox hydrogels ("wires"). Glucose oxidase has been "wired" with polyelectrolytes having electron relaying $[Os(bpy)_2Cl]^{+2}$ redox centers in their backbones. Hydrogels were formed upon crosslinking the enzyme and its wire on electrodes. These electrodes had high current densities and operated at a potential of 0.3V vs. SCE. The electrooxidizable interferants are eliminated through peroxidase-catalyzed preoxidation in a second, nonwired, hydrogen peroxide generating layer on the "wired" enzyme electrode.

SUMMARY OF THE INVENTION

A small (e.g., 0.29 mm), recessed, non-corroding metal (e.g., gold, platinum, palladium) or carbon wire electrode for subcutaneous in vivo glucose monitoring, approaching in its performance all of the above listed requirements, including in vivo one-point calibration, has been produced. The electrode was constructed by

depositing active polymer layers into a recess formed by etching away gold from an insulated gold wire.

The active polymer layers, including a sensing layer, a glucose flux-limiting layer, a biocompatible layer, and optionally a peroxidase-based interferant eliminating layer, were protected within the recess against mechanical damage. (The peroxidase-based interferant eliminating layer is not required when a lower redox potential polymer is used, as described above.) The recess and its polymer layers also reduced the transport of glucose to the wire electrode contacting sensing layer.

By limiting the glucose flux, the desired linear response range, spanning the clinically relevant glucose concentration range was obtained. The inventive biosensors are able to accurately measure, for example, approximately 2-30 mμ glucose and approximately 0.5-10 mμ lactate, *in vivo*. The sensor has no leachable components, and its four crosslinked polymer layers contain only about 5 μg of immobilized material, and only a few nanograms of polymer-bound osmium. Preoxidation of the interferants in one of the four layers makes possible one-point *in vivo* calibration of the sensor.

BRIEF DESCRIPTION OF THE FIGURES

Fig. 1 is a schematic drawing of an electrode of the present invention.

Fig. 2 is a graphical representation of data generated comparing current density of glucose electrooxidation on electrodes made with PVI₃-Os (open triangles) with those made with PVI₃-Os (filled triangles).

Fig. 3 is a graphical representation of data generated comparing dependency of current generated on the depth of the recess.

Fig. 4 is a graphical representation of data generated comparing dependency of the ratio of the current generated and the charge required to electroreduce or oxidize the polymer redox centers in the sensing layer on the thickness of the sensing layer.

Fig. 5 is a graphical representation of data generated comparing variation of current generated by electrodes having sensing layers of differing thickness and diffusion limiting layers of different compositions and thickness. Solid circles: 7.5 μm thick sensing layer of PVI₃-Os (52%), rGOX (35%), PEGDGE (13%), coated with 4 μm PAL/PAZ (1:1 ratio). Open circles: 5.0 sensing layer. Solid triangles: 12.5 μm sensing layer and 7 μm PAL/PAZ (1:2 ratio). Open triangles: 7.5 μm sensing layer and 4.5 μm PAL/PAZ (1:2 ratio).

Fig. 6 is a graphical representation of data generated comparing dependency of current generated on the presence of ascorbate, in the absence and presence of lactate and glucose. The concentrations of ascorbate (A), lactate (L) and glucose (G) are shown. Ascorbate is an electrooxidizable interferant. Upon addition of lactate its electrooxidation current is suppressed while that of glucose is not suppressed.

Fig. 7. is a graphical representation of data showing current density and corresponding subcutaneous glucose concentration measured with the subcutaneously implanted electrodes of the present invention in a rat animal model. Large solid circles show blood glucose concentrations measured on withdrawn blood samples using a YSI analyzer.

Fig. 8 is a Clarke-type clinical grid analyzing the clinical relevance of the blood glucose measurements of Fig. 7.

Fig. 9 is a Clarke-type clinical grid of all possible correlations obtained when each of the 24 glucose analyses of Fig. 7 were used for single point calibration of either implanted electrode.

Fig. 10 is a Clarke-type clinical grid testing improvement of the single point calibration through redundant electrodes, the readings of which were within the standard deviation calculated for all differences between simultaneous readings by a pair of implanted electrodes.

15 DETAILED DESCRIPTION OF THE INVENTION

The present invention includes an insulated, non-corroding conducting metal (e.g., gold, platinum, palladium) or carbon wire-based small (e.g., 290 μm) O.D. subcutaneous glucose sensor, allowing one-point calibration in vivo. As shown in Fig. 1, its construction involves coating a small (e.g., 250 μm) diameter non-corroding metal or carbon wire 2 with an electrically insulating material 4, e.g., a polyimide, and, layering in a recess 6 formed by etching or removing a portion of the metal or carbon, the following active polymeric layers: an immobilized, "wired," glucose oxidase layer 8; an electrically insulating and glucose diffusion limiting layer 10 formed, for example, by crosslinking a polyallylamine (PAL) with a polyaziridine (PAZ); optionally, an interference eliminating layer 12, e.g., of crosslinked horseradish-peroxidase and lactate oxidase; and a biocompatible film 14 e.g., of poly(ethylene oxide) (PEO) derivatized to allow its photo-crosslinking. The

outside diameter a of the wire 2 is preferably about 0.25 mm or less, and the outside diameter b of the insulated wire is preferably about 0.3 mm or less. The recess 6 in the insulated electrode extends from the tip 16 of the electrode which is open to the surrounding environment, to the top 18 of the wire 2 in the insulating sheath, generally for a length c of less than about 0.150 mm, and preferably about 0.125 mm.

The electrodes have no leachable components. The total amount of polymers and enzymes is preferably about 5 μ g. The glucose response through the physiologically relevant 2-20 mM concentration range is close to linear. The electrodes do not respond to ascorbate, urate or acetaminophenol for at least about 36 hours. Their 10-90% response time is about 90 seconds at 2 mM glucose and about 30 seconds at 20 mM glucose. Their sensitivity, after about 30 minutes equilibration, is stable for about 72 hours at 37°C in 10 mM glucose, the current deviating from the average by less than $\pm 5\%$. The electrodes have substantially no signal output, e.g., current, charge, or potential, when the concentration of the analyte to be measured is zero.

Two electrodes implanted subcutaneously in a rat tracked blood glucose levels, and their absolute, uncorrected current output was proportional to the blood glucose concentration. Analysis of the correlation between the blood glucose levels in the tail vein and the current output of the sensors in the subcutaneous regions of the thorax and between the scapulae of the same rat showed that even when the probed sites and organs differed in the extreme, one point *in vivo* calibration was valid. The analysis also showed the value of implanting redundant sensors. Had

clinical decisions been made based on individual sensor readings, calibrated at one point, 94% would have been clinically correct. By using redundant sensors and accepting only those pairs of readings that were within one standard deviation, the percentage of the clinically correct decisions was increased to 99%.

It is understood that one of skill in the art may substitute various components of the biosensor described above with known materials to obtain an modified biosensor using the principles outlined herein. For example, the following substitutions are contemplated:

Base electrode: The base electrode of the inventive sensor may be formed of a non-corroding metal or carbon wire, for example vitreous carbon, graphite, platinum, palladium, or gold. Gold is preferred, and is used in the following illustrative examples of the invention.

Insulator: The conductive metal or carbon wire is coated with an electrically insulating material, which also forms a wall about the recess which houses the active polymeric components. The insulating material may be, for example, polyurethane, teflon (fluorinated polymers), polyethyleneterephthalate (PET, Dacron) or polyimide. The insulating material is preferably a biocompatible polymer containing less than about 5% water when in equilibrium with physiological body fluids, e.g., subcutaneous tissue.

Recess: In general, the recess at the tip of the electrode is approximately 20 to 150 μm in length *c*, and preferably is approximately 50 to 125 μm .

Etching method: The method for etching metal from the tip of the electrode described herein may utilize

chloride, bromide or iodide in the bath in lieu of cyanide as described. Bromide is preferred, because it is less toxic and, like $\text{Au}(\text{CN})_2^-$, AuBr_4^- is a water soluble anion. Thus, in aqueous HBR, the metal, e.g., gold, can be etched by applying a sufficiently oxidizing potential where gold is electrolytically dissolved:



Wired Enzyme Layer: In the sensing enzyme-containing layer, glucose oxidase may be substituted with other redox enzymes to measure other relevant clinical compounds. For example, lactate oxidase may be used for the *in vivo* detection of lactate, important in determining if an organ is receiving sufficient oxygen through the blood.

Useful redox polymers and methods for producing the sensing layer are described, for example, in U.S. Patent Nos. _____ (matter 3,4,5,7,8). Additional redox polymers include, for example, poly(1-vinyl imidazole); poly(4-vinyl pyridine); or copolymers of 1-vinyl imidazole such as poly (acrylamide co-1-vinyl imidazole) where the imidazole or pyridine complexes with $[\text{Os} (\text{bpy})_2 \text{Cl}]^{+/2+}$; $[\text{Os} (4,4'\text{-dimethyl bipyridine})_2 \text{Cl}]^{+/2+}$; $[\text{Os} (4,4'\text{-dimethyl phenanthroline})_2 \text{Cl}]^{+/2+}$; $[\text{Os} (4,4'\text{-dimethoxy phenanthroline})_2 \text{Cl}]^{+/2+}$; and $[\text{Os} (4,4'\text{-dimethoxy bipyridine})_2 \text{Cl}]^{+/2+}$; to imidazole rings. The imidazole ring compounds are preferred because their complexes have more reducing redox potentials, i.e., closer to that of the SCE potential. At these more reducing potentials, the rate of electrooxidation of interferants and the current generated thereby.

Barrier Layer: The polymeric barrier layer is electrically insulating and limits diffusion of glucose through to the sensing layer. It may be formed, for

example, by crosslinking a polyallylamine (PAL) with a polyaziridine (PAZ). Alternatively, PAL may be replaced wholly or in part with a zwitterionic polymer obtained by quaternizing poly(vinylpyridine) with
5 bromoacetate and dialyzing against 0.15M NaCl or by a polyanion such as a polysulfonic acid.

The barrier layer may contain a polyanionic polymer, in which the rate of permeation of anionic interferants such as ascorbate and urate is slowed.
10 This layer may also contain a polycation that enhances the retention of the polyanion by electrostatic bonds and improves wetting by the biocompatible layer.

Interference Eliminating Layer: As described above, this layer is optional, in that it is not
15 required when a redox polymer having a more reducing potential is used, such as PVI₁₅-dmeOs (Ohara et al., Analytical Chemistry, 1994, 64:2451-2457). At operating potentials of approximately -0.10 to +0.25 for the glucose biosensor, the rate of electrooxidation
20 of interferants such as ascorbate, urate and acetaminophen is very slow relative to that of glucose through its physiological concentration range.

When a separate interferant eliminating layer is used, it preferably contains a peroxidase enzyme which
25 may or may not be preactivated. Such interferant eliminating layers are disclosed, for example, in U.S. Patent Number (matter 4) ✓ and U.S. Patent Application No. 08/161,682 which disclose the structure and function of interferant eliminating biosensors. The
30 glucose biosensor preferably contains lactate oxidase (LOX) in combination with peroxidase in the interferant eliminating layer. However, for biosensors used to detect lactate, glucose oxidase would be used with peroxidase. In a similar manner, the enzyme

composition of the interferant eliminating layer may be altered for a specified function.

Biocompatible Layer: In general, the biocompatible layer is comprised of hydrogels, e.g.,
5 polymeric compositions which contain more than about 20% by weight of water when in equilibrium with a physiological environment such as living tissue or blood. An example is crosslinked poly(ethylene oxide), e.g., poly(ethylene oxide) tetraacrylate. The
10 polymeric compositions must be non-toxic and compatible with living systems.

Method for making multi-layered recessed biosensors: Insulated non-corroding metal or carbon wires that have been etched as described above to
15 contain a recess at the tip, are placed in a block that serves as an X-Y positioner. The wires vertically traverse the block and are held in place, e.g., by pressure. The blocks with the wires can be formed of elements, each element having multiple half-cylinder
20 grooves running vertically. The wires are placed in these grooves and the elements are assembled into the block using screws. For example, the block may be formed of aluminum having equally spaced holes, (900 for a 30x30 array of wires), each hole to contain one
25 wire. The block is positioned under a fixed micronozzle that ejects a fluid in to the recess of the insulated wire.

To reduce the requirement of precision in the positioning of the block and the micronozzle, the
30 nozzle is electrically charged, with the wire having an opposite charge, or the wire being grounded or at least having a potential such that there is a potential difference between the nozzle and the wire. Because the nozzle is charged, the microdroplets it ejects are

also charged with the same type of charge (positive or negative) as the nozzle. The higher the potential on the nozzle (e.g., versus ground potential), the higher the charge on the ejected microdroplets. If the tip of the wire to be coated is at ground potential or has a charge of the opposite type, the charged microdroplets are guided into the recess to deposit on the electrode, even if the jet of microdroplets is not vertical, i.e., even if the micronozzle is not precisely aligned above the wire's tip.

Furthermore, the higher the electrical potential on the nozzle (relative to ground) the greater the charge on the ejected microdroplet. When the charge is high enough, the droplet breaks up into two or more smaller droplets because of electrostatic repulsion of charges on the droplet. Thus, the very small droplets all "drift" (drift meaning transport assisted by an electrical field) to the recessed electrode surface and are collected on it, even if they did not originate in a nozzle precisely aligned with the electrode.

This coating method is useful in making any small biosensor, not only those in recessed zones.

Clinical Use of the Recessed Biosensors::

The recessed biosensors of the present invention have sufficient sensitivity and stability to be used as very small, subcutaneous biosensors for the measurement of clinically relevant compounds such as glucose and lactate. The electrodes accurately measure glucose in the range of about 2-30 μ M and lactate in the range of about 0.5-10 mM. One function of the implanted biosensor is to sound an alarm when, for example, a patient's glucose concentration is too low or too high. When pairs of implanted electrodes are used, there are

three situations in which an alarm is triggered: low glucose concentration, high glucose concentration; sensor malfunction as determined by a discrepancy between paired readings of the two sensors. A
5 discrepancy sufficient to trigger the alarm may be, for example more than two or three times the standard deviation persisting for a defined period, e.g., not less than ten minutes. Such a system may be useful in sleeping patients, and also in emergency and intensive
10 care hospital rooms, where vital functions are continuously monitored.

Another function of the inventive biosensors is to assist diabetics in maintaining their blood glucose levels near normal. Many diabetics now maintain higher
15 than normal blood glucose levels because of danger of coma and death in severe hypoglycemia. However, maintaining blood glucose levels substantially, e.g., approximately 40% or more above normal leads to retinopathy and blindness as well as to kidney failure.
20 Use of the subcutaneous biosensors to frequently, if not continuously, monitor glucose concentrations is desirable so that glucose concentrations can be maintained closer to an optimum level.

The subcutaneous biosensors can be used to measure
25 the rate of rise and decline of glucose concentrations after a meal or the administration of glucose (e.g., a glucose tolerance test). The sensors are also useful in feedback loops for automatic or manually controlled maintenance of glucose concentrations within a defined
30 range. For example, when used in conjunction with an insulin pump, a specified amount of insulin is delivered from the pump if the sensor glucose reading is above a set value.

In all of these applications, the ability to promptly confirm that the implanted sensor reading is accurate is essential. Prompt confirmation and rapid recalibration are possible only when one-point calibration is valid. Generally, even if a sensor's response is linear through the relevant concentration range, calibration requires at least two blood or fluid samples, withdrawn from the patient at times when the glucose concentration differs. It usually takes several hours for the glucose concentration to change sufficiently to validate proper functioning by two-point calibration. The ability to confirm and recalibrate using only one point is thus a highly desirable feature of the present invention.

Redundant sensors (e.g., at least two) are preferred in the clinical application of the subcutaneous biosensors. Such redundancy permits signaling of failure of any one sensor by recognition of an increase in the discrepancy between the readings of the sensors at one time point, e.g., more than two standard deviations apart. The redundant sensors may be implanted near each other or at remote sites.

It is preferred that the biosensors be implanted in subcutaneous tissue so as to make the sensor relatively unobtrusive, and at a site where they would not be easily dislodged, e.g., with turning or movement. It is also preferred, when readings are not corrected for temperature (which they generally are) that the sensors be implanted where they are likely to be at body temperature, e.g., near 37°C, and preferably covered by clothing. Convenient sites include the abdomen, inner thigh, arm.

Although we describe here continuous current measurement for assaying glucose, the electrical

measurement by which the glucose concentration is monitored can be continuous or pulsed. It can be a current measurement, a potential measurement or a measurement of charge. It can be a steady state measurement, where a current or potential that does not substantially change during the measurement is monitored, or it can be a dynamic measurement, e.g., one in which the rate of current or potential change in a given time period is monitored. These measurements require at least one electrode in addition to the sensing electrode. This second electrode can be placed on the skin or can be implanted, e.g., subcutaneously. When a current is measured it is useful to have a potentiostat in the circuit connecting the implanted sensing electrode and the second electrode, that can be a reference electrode, such as an Ag/AgCl electrode. When a current is measured the reference electrode may serve also as the counter electrode. The counter electrode can also be a separate, third electrode, such as a platinum, carbon, palladium or gold electrode.

In addition to implanting the sensing electrode in the body, fluid from the body, particularly fluid from the subcutaneous region, can be routed to an external sensor. It is preferred in this case to implant in the subcutaneous region a microfiltration giver and pull fluid to an evacuated container, the fluid traversing a cell containing the sensing electrode. Preferably this cell also contains a second electrode, e.g., a reference electrode which may serve also as a counter electrode. Alternatively, the reference and counter electrodes may be separate electrodes. In coulometric measurements only two electrodes, the sensing electrode and the counter electrode are required. The flow of body fluid may be pulsed or continuous. Other than an

implanted microfiltration fiber, also a microdialysis fiber may be used, preferably in conjunction with a pump.

Increased stability of the biosensors:

5 To increase the stability and useful life of the
inventive biosensors, it is advantageous to use
intrinsically more stable enzymes and redox polymers.
However, even if the enzyme and redox polymer degrade
10 in the glucose electrooxidation process by which the
signal (current) is generated, it is possible to
greatly extend the useful life of the implanted
electrodes and reduce the frequency of their required
recalibration after implantation.

15 A simple measure by which the life of the
implanted electrodes can be extended and the frequency
of their required recalibration reduced involves
turning the electrodes "on" by applying a bias, i.e., a
potential, only during the period of measurement, then
turning the biasing potential off or reducing it, so
20 that a lesser current will flow. It is generally
sufficient to perform only one measurement every five
or even ten minutes, or longer, because glucose
concentrations do not change abruptly.

25 Another measure is to lower the glucose flux to
the sensing layer much as possible, consistent with
maintaining adequate sensitivity and detectivity.
Reduction of the glucose flux to the sensing layer
reduces the current. Therefore, even though this
stabilizes the electrodes, i.e., slows the loss in
30 sensitivity, the flux dependent current must not be
excessively reduced. Usually a current of 3-5 nA at
2mM glucose concentration is adequate. When the
glucose flux is lowered by using one or more glucose-

flux reducing polymer slayers, such as the PAL/PAZ layer, the lifetime of the sensor is increased.

- EXAMPLES

EXAMPLE 1

Electrode Preparation

Electrodes were made of a polyamide-insulated 250 μm diameter gold wire, having an outer diameter (O.D.) of 290 μm (California Fine Wire Co., Grover City, CA). Heat shrinkable tubing (RNF 100 3/64" BK and 1/16" BK, Thermofit®, Raychem, Menlo Park, CA) and a two component silver epoxy (Epo-tek H₂O₂E; Epoxy Tech, Inc., Billerica, MA) were used for electrode preparation.

15 The glucose sensing layer was made by crosslinking a genetically engineered glucose oxidase (rGOX) (35% purity, Chiron Corp., Emeryville, CA) with a polymer derived of poly(vinylimidazole) (PVI), made by complexing part of the imidazoles to $[\text{Os}(\text{bpy})_3\text{Cl}]^{+2+}$.

20 The resulting redox polymer, termed PVI-Os, was
synthesized according to a previously published
protocol. (Ohara et al., 1993, Anal. Chem., 65:24).
Poly(ethylene glycol) diglycidyl ether 400 (PEDGE;
Polysciences, Warrington, PA) was used as the
25 crosslinker.

The barrier layer between the sensing and interference-eliminating layers was made of polyallylamine (PAL; Polysciences) crosslinked with a polyfunctional aziridine (PAZ) (XAMA-7; Virginia Chemicals, Portsmouth, VA).

The interference-eliminating layer was prepared by co-immobilizing horseradish peroxidase (HRP) type VI (Cat. no. P-8375, 310 U/mg, denoted herein as HRP-VI, Sigma, St. Louis, MO) and HRP for immunological assay (No. 814407, min 1000 U/mg, denoted HRP-BM, Boehringer-

Mannheim, Indianapolis, IN) with lactate oxidase from *Pediococcus* sp. (Cat. No. 1361, 40 U/mg denoted LOX, Genzyme, Cambridge, MA) and a recombinant microbial source (Cat. No. 1381 denoted rLOX, Genzyme). Co-immobilization was performed using sodium periodate (Cat. No. S-1147, Sigma) according to the methods described in Maidan and Heller, 1992, Anal. Chem. 64:2889-2896.

The biocompatible layer was made of 10% aqueous poly(ethylene oxide) tetraacrylate (PEO-TA). To form the photocrosslinkable polymer, PEO was acrylated by reaction with acryloyl chloride. The 18,500 g/mol PEO (Polysciences) is a tetrahydroxylated compound by virtue of two hydroxyl groups on a bisphenol A bisepoxide that linked two α , ω -hydroxy-terminated 9,000 g/mol PEO units. Acryloyl chloride (Aldrich, Milwaukee, WI) in a 2 to 5 molar excess was used to acrylate the polymer (10% w/v PEO in benzene). Triethylamine (Mallinkrodt, Paris, KY) was used as a proton acceptor equimolar with the acryloyl chloride.

Other chemicals used were bovine serum albumin (BSA) fraction V (Cat. No. A-2153), BSA, ascorbic acid, uric acid, 4-acetaminophenol, L(+)-lactic acid, and hydrogen peroxide 30%, all from Sigma. All chemicals were used as received. Solutions (if not otherwise specified) were made with distilled, deionized water. Glucose monitoring was performed in buffer, in bovine serum (Sigma, Cat. No. S-6648) containing antibiotic-antimycotic solution (Sigma, Cat. No. A-8909) at 37°C and in rats.

Instrumentation

In making the recessed gold electrodes, a potentiostat/galvanostat (PAR Model 173, Princeton

Applied Research, Princeton, NJ) operated in a galvanostatic mode, and a sonicator (Fisher Scientific, Pittsburgh, PA) were used. Cyclic voltammograms were recorded with a potentiostat (PAR Model 273A) and a conventional electrochemical cell having a Pt wire counter and a SCE reference electrode and were evaluated with PAR 270 software. Glucose signals were monitored with a bipotentiostat (Biometra EP 30) and a two channel strip-chart recorder. The recessed electrodes were coated under a microscope (Bausch & Lomb) using a micromanipulator (Narishige, Seacliff, NY). The micropipettes were pulled with a micropipette puller (Narishige). Temperature was controlled with an isothermal circulator (Fisher Scientific).

Electrode Preparation:

Five cm lengths of polyamide insulated gold wire were cut with a sharp razor blade. Electrical contact was made at one end with silver epoxy to an insulated stainless steel wire and the junction was covered with insulating heat shrinkable tubing. The recess forming electrochemical etching process was carried out in 10 ml of 3M potassium cyanide, with the gold wire as the working electrode and a platinum or gold wire as the counter electrode. The wires were placed in contact with the bottom of the beaker, all electrodes being equidistant from the counter electrode. The beaker was sonicated during the etching procedure. The ends of the gold wires were bent upwards, so that agitation by the sonicator caused the oxygen bubbles formed during the etching process to rise and escape. The electrodes were then thoroughly washed and immersed in water for 30 minutes.

A recess 6, i.e., channel, in a polyamide insulated gold wire 2 is formed by electrochemical etching of the gold under galvanostatic control. By controlling the charge, the total amount of gold electrooxidized and dissolved as $\text{Au}(\text{CN})_2$ is defined. When the conditions were set so that the CN^- transport into the channel and the $\text{Au}(\text{CN})_2^-$ transport out of it are not rate limiting, (e.g., sonicated bath and high concentration of potassium cyanide, at least approximately 0.2M, and preferably 3M), a flat gold wire surface is produced at the bottom of channels with aspect ratios of 0.5 to 2.0. Thus, when the CN^- concentration is high enough and the wires are ultrasonically vibrated, the tips of gold wires are flat. Passage of 1.5 coulombs per electrode at 8 mA current produced approximately 125 μm deep cavities or channels. At theoretical efficiency for one-electron oxidation, 3.08 mg of gold would have been etched. The amount of gold actually etched was only 0.076 mg, showing significant CN^- or water oxidation. Nevertheless, the process is reproducible, accurate and fast with 20 electrodes being processed in each batch in less than five minutes. The recess-forming procedure was highly reproducible, with a deviation of $\pm 10 \mu\text{m}$ found (using an objective micrometer) for a batch of 30 recessed electrodes. Before coating, the electrodes were examined under a microscope for flatness of the gold surface and correct depth.

Fig. 1 shows a schematic side view in cross-section of an electrode of the present invention, showing the gold wire 2, insulating coating 4, and recess or channel 6. The recessed gold surfaces were coated by filling of the cavities or channels 6 with aqueous solutions containing the crosslinkable

components of the different layers, and their crosslinkers. The solutions were introduced under a microscope with a micropipette (connected to a microsyringe by polyethylene tubing and shrink tubing),
 5 using a micromanipulator. After application of each of the individual layers, the electrodes were cured overnight at room temperature, in air.

Electrode structure:

10 The electrodes were prepared by sequentially depositing four layers within the recess or channel 6. The layers were: the sensing layer 8, the insulating layer 10, the interference-eliminating layer 12 and the biocompatible layer 14. The sensing layer, containing
 15 "wired" redox enzyme is positioned adjacent to and in contact with the gold wire 2. The insulating layer 10 is positioned between the sensing layer 8 and the peroxidase-based interferant-eliminating layer 12. The biocompatible layer 14 fills the remaining space in the
 20 recess 6 and is in contact with the environment outside the electrode. The thin polymer layers are well protected by containment within the polyamide sleeve 4.

The sensing layer 8 was made by "wiring" rGOX to
 25 the gold electrode through a redox hydrogel to which the enzyme was covalently bound. The electrodes were prepared as follows: 10 mg/ml solutions were made from

1. the PVI-0s redox polymer in water,
2. the crosslinker, PEGDGE, in water, and
- 30 3. the enzyme, rGOX, in a 10 mM HEPES solution adjusted to pH 8.15.

A redox hydrogel was formed by mixing the three solutions so that the final composition (by weight) was 52% redox polymer, 35% enzyme and 13% crosslinker.

The insulating layer 10 prevented electrical contact between the redox hydrogel and the interference eliminating enzymes (HRP and LOX). PAL:PAZ was used as the insulating material. The film was deposited from a solution obtained by mixing in volume ratio of 1/1, 1/2 or 1/3, a PAL solution (4.5 mg in 100 mM HEPES buffer at pH 7.0) and a freshly prepared PAZ solution (30 mg/ml). The PAZ solution was used within 15 minutes of preparation.

10 The interference-eliminating layer 12 was prepared according to a previously published protocol, Maidan and Heller, 1992, Anal. Chem., 64:2889-2896. 50 μ l of a 12 mg/ml freshly prepared sodium periodate solution was added to 100 μ l of a solution containing 20 mg/ml HRP (HRP-VI or HRP-BM) and 100 mg/ml LOX (LOX or rLOX) in 0.1 M sodium bicarbonate and the mixture was incubated in the dark for two hours. Alternatively, the oxidation of HRP could be carried out prior to adding LOX and crosslinking.

20 The biocompatible layer 14 films were photocrosslinked by exposure to UV light (UVP, Inc., San Gabriel, CA; Blak-Ray; spectral peak at 360 nm, UV irradiance at the sample 200 mW/cm²) for one minute. The initiator used was 2,2-dimethoxy-2-phenylacetophenone (Aldrich). A solution of 300 mg/ml of the initiator in 1-vinyl-2-pyrrolidinone (Aldrich) was added to the prepolymer mixtures. Approximately 30 μ l of the initiator solution was added per ml of 10% w/w aqueous solution of the tetraacrylated PEO. The prepolymer were crosslinked *in situ* inside the recess of the electrode. The films were prepared by filling the recess with the prepolymer solution twice and exposing the electrode to the UV light source after each time the cavity was filled.

In vitro Testing of Electrodes:

In vitro experiments were carried out in batch fashion at 25° and 37°C, using a conventional three electrode electrochemical cell with the enzyme-modified gold wire as the working electrode, a platinum wire as the counter electrode and a saturated calomel reference electrode (SCE). The electrolyte was a 20 mM phosphate buffered-saline solution containing 0.15 M NaCl at pH 7.15. Experiments in serum were performed at 37°C, adding 100 µL antibiotic-antimycotic solution to 10 ml serum. Phosphate buffered-saline and serum were agitated during the experiments. The working potential was +0.3 V versus SCE for experiments with the PVI-Os polymers.

Structure and Performance: The depth *c* of the channel 6 and the thickness of the polymer layers in it controls the mass transport, i.e., flux of glucose, to the sensing layer. By controlling these parameters, the apparent Michaelis constant (K_m) is adjusted to about 20-30 mM glucose. The polyimide wall 4 of the channel 6 also protects the four polymer and polymer/enzyme layers 8, 10, 12, 14 against mechanical damage and reduces the hazard of their loss in the body. Because the glucose electrooxidation current is limited by glucose mass transport through the recess 16 and its polymer films 8, 10, 12, 14, rather than by mass transport to the tissue-exposed tip 16, the current is practically insensitive to motion. Evidently, the electrooxidation rate of glucose in the recessed sensing layer 8 is slower than the rate of glucose diffusion to the channel's outer fluid contacting interface.

PVI₂-Os is preferred as the "wire" of the sensing layer when an interference eliminating layer of HRP and

LOX is used, but not in the absence of this layer, i.e., when redox polymers with more reducing redox potential are preferred. The subscript (5) is used to indicate that, on the average, every fifth vinylimidazole mer carries an electron-relaying osmium center. Use of electrodes formed with PVI₅-Os and PVI₃-Os (every third 1-vinylimidazole mer carrying an osmium center) are compared in Fig. 2, and show higher current density of glucose electrooxidation on electrodes made with PVI₅ - Os (open triangle) than on those made with PVI₃ - Os (filled triangles).

Depth of the recess and the sensing layer: Channels of 125, 250, and 500 μm depth, were investigated to assess the dependence of the current on the depth of the recess (Fig. 3), with the total amount of PVI₅ - Os and rGOX being kept constant. Much of the loss in current in the deeper cavities resulted not from reduced glucose mass transport, but from adsorptive retention of part of the enzyme and polymer on the polyamide wall when microdrops of the component solutions were introduced into the recess in the process of making the electrodes. Through repeated rinsing with water, some of the adsorbed polymer and enzyme on the walls were washed onto the electrode surface, increasing the current. The highest currents were seen after five washings. When the thickness of the sensing layer was increased through increasing the number of coatings (Fig. 4) the ratio of current to charge required to electroreduce or electrooxidize the redox polymer in the sensing layer reached a maximum, then dropped. For the preferred 125 μm recess, 10 coatings, producing an approximately 13 μm thick wired-rGOX sensing layer, yielded sensors that had the desired characteristics for *in vivo* use.

002260 "T229960

The insulating layer: This layer electrically insulates the redox enzymes of the interference eliminating layer (HRP and LOX) from the "wired" rGOX layer and limits the glucose flux to the sensing layer, thereby extending the useful life of the electrode. PAL crosslinked with PAZ, forming a polycationic network at pH 7.09 is preferred. The best results, i.e., best stability of current outputs, were obtained using 1:2 PAL:PAZ (Fig. 5), with three coatings applied to form an approximately 7 μm thick crosslinked film.

The interference eliminating layer: Interferants, particularly ascorbate, urate, and acetaminophenol, are oxidized in the third layer, containing LOX and HRP. In this layer, lactate, the typical concentration of which in blood is 1 mM, reacts with O_2 to form H_2O_2 and pyruvate. H_2O_2 , in the presence of HRP, oxidizes ascorbate, urate, and acetaminophenol, being reduced to water. The preferred coimmobilization process involved two separate steps: periodate oxidation of oligosaccharide functions of HRP to aldehydes, followed by mixing with LOX and formation of multiple Schiff bases between HRP-aldehydes and LOX amines (e.g. lysines) and between HRP aldehydes and amines. The thickness of the interference eliminating layer is approximately 85 μm and is made by applying successive coatings, e.g., about six coatings. Fig. 6 shows that electrooxidizable interferants were eliminated in the presence of lactate at physiological levels. LOX slowly lost its activity in the crosslinked HRP-LOX layer. This led to degradation of the ability of the layer to eliminate interferants. After 36 hours of operation at 37°C, a measurable current increment was noted when enough ascorbate was added to produce a 0.1 mM concentration.

The biocompatible layer: A preferred biocompatible layer consists, for example, of photocrosslinked tetraacrylated 18,500 Da poly(ethylene oxide) (Pathak et al., 1993, J. Am. Chem. Soc., 114:8311-8312). The thickness of this layer, made by sequential photo-crosslinking of two coatings, is about 20 μm . One minute UV exposure required for the photocrosslinking process reduced the sensitivity by $16 \pm 2\%$.

10

002260" T2282550

Example 2: In vivo use of sensor

The objective of this experiment was to establish the validity of a one-point in vivo calibration. Two sensors were simultaneously implanted subcutaneously in a rat, one on the thorax, the second between the scapulae. To make the difference between the blood sampled and the subcutaneous fluid proved with the sensors as extreme as possible, i.e., to probe whether the one-point calibration holds even if the organs sampled are different and the sampling sites are remote, blood was withdrawn from the tail vein. Blood glucose levels were periodically measured in withdrawn samples, while the absolute uncorrected sensor current output was continuously monitored.

In vivo experiments (6-10 hours) were carried out in 300 g male Sprague-Dawley rats. The rats were fasted overnight and prior to the experiment were anaesthetized with an intraperitoneal (i.p.) injection of sodium pentobarbital (65 mg/kg rat wt). An i.p. injection of atropine sulfate (166 mg/kg rat wt) was then administered to suppress respiratory depression. Once the rat was anaesthetized, a portion of the rat's abdomen was shaved, coated with a conductive gel, and an Ag/AgCl surface skin reference electrode was attached. This electrode served also as the counter electrode. Sensors were then implanted subcutaneously using a 22 gauge Per-Q-Cath Introducer (Gesco International, San Antonio, TX) on the rat's thorax, or subcutaneously in the intrasceular area through a small surgical incision. The sensors were taped to the skin to avoid sensor movement. The sensors, along with the reference electrode, were connected to an in-house built bipotentiostat. The operating potential of the sensors was 0.3 V vs. Ag/AgCl, with the Ag/AgCl

electrode serving as both the reference counter electrode. Sensor readings were collected using a data logger (Rustrak Ranger, East Greenwich, RI) and at the end of the experiment were transferred to a computer.

5 During the experiment, the rat's body temperature was maintained at 37°C by a homeostatic blanket. The sensors were allowed to reach a basal signal level for at least one hour before blood sampling was started. Blood samples were obtained from the tail vein and all
10 blood samples were analyzed using a glucose analyzer (YSI, Inc., Yellow Springs, OH; Model 23A).

Approximately thirty minutes after the start of blood sampling, an i.p. glucose infusion was started using a syringe pump (Harvard Apparatus, South Natick,
15 MA) at a rate of 120 mg glucose/min kg rat wt. The glucose infusion was maintained for approximately one hour.

As seen in Fig. 7, at 410 min the current dropped precipitously. Such a drop was observed in other
20 measurements with subcutaneously implanted electrodes between 400 and 600 min, but was never observed in electrodes operated in buffer at 37°C. When the failed electrodes were withdrawn and retested in buffer, most of their original sensitivity was found to be intact.
25 The cause for this apparent deactivation was failure of the counter/reference Ag/AgCl electrode on the rat's skin to make good electrolytic contact, and was not due to any failure of the implanted sensor. Using an arbitrarily chosen point to calculate a calibration
30 curve for each electrode, i.e., one blood glucose level determination and one current measurement to establish the scales, all the data from Fig. 7 were plotted in a Clarke-type, (Clarke et al., 1987, Diabetes Care, 5:622-627) clinical grid (Fig. 8), without further

correction. In this analysis, points falling in region A of the grid are considered clinically accurate, while those in region B are considered clinically correct. Points falling in region C are not correct, but would not lead to improper treatment. Points in regions D and E are incorrect and if treatment would rely on these, it would be improper.

All of the points, from both electrodes, were in regions A and B, with 43 of the 48 points being in region A. The three points in region B near 100 mg/dl glucose, for the electrode implanted between the scapulae, were the last three points of the experiment, at about 410 min. Notwithstanding the failure mode at 400-600 min because of poor electrolytic contact of the counter/reference electrode with the skin and failure after 36 hours by deactivation of the lactate oxidase, resulting in loss of interference elimination, one-point calibration is shown here to be practical. After such calibration, the readings of the subcutaneous sensors provide, without any correction, clinically useful estimates of blood glucose levels.

Fig. 9 shows the distribution of all possible correlations obtained when each of the 24 glucose analyses was used for single point calibration of either implanted electrode. There are $2 \times 24 \times 24 = 1152$ points in the distribution. Of these, 78% are in region A, 15% are in region B, 1% in region C, 6% are in region D, and no points are in region E.

In Fig. 10, we tested for the improvement of the single point calibration through using redundant electrodes. First, the readings of electrode A were normalized with respect to those of electrode B by multiplying each reading by the average output of electrode B divided by the average output of electrode

5 A. Next the standard deviation was calculated for the
differences between the 24 sets of readings of
implanted electrode B and corrected readings of
implanted electrode A. Then, all those sets of
10 readings that differed by more than the standard
deviation were rejected. The number of sets was
reduced thereby from 24 to 11; 82% of the points were
in region A, 17% in region B, 1% in region D, and no
points in regions C and E. The distribution
15 demonstrates that the sensors can be calibrated through
a single independent measurement of the glucose
concentration in a withdrawn blood sample. They also
demonstrate the improvement in clinical accuracy
resulting from the use of redundant subcutaneous
20 sensors. The selection of those data points that
differed by less than the standard deviation for the
entire set led to a sixfold reduction in the
probability of clinically erring in a decision based on
readings of the implanted sensors.

20

Stability and Other Characteristics:

In order to improve the stability, more
thermostable recombinant GOX, (rGOX; Heller, 1992, J.
Phys. Chem., 96:3579-3587) rather than GOX is used in
25 the sensor and glucose transport is reduced to make the
sensor current diffusion, not enzyme turnover, limited.
The glucose flux is attenuated by the three outer
layers and the sensing layer itself. Because the
sensing layer contains a large excess of glucose
30 oxidase, its activity greatly exceeds that needed for
electrooxidizing the attenuated glucose flux, and the
sensor's stability is improved.

The stability can be tested by methods known, for
example, tested in the presence of 0.1 mM ascorbate in

10 mM glucose at 37°C. The current output of a typical optimized electrode was about 35 nA and the apparent K_m , derived from an Eadie-Hofstee plot, was about 20 mM (Table 1). The 10-90% response time was approximately one minute.

As expected, and as can be seen in Fig. 5, with thinner films the glucose mass transport was increased, i.e., the current was higher, while for thicker films the stability was improved. Because of the high sensitivity of thin sensing film (approximately 1 μ m) electrodes (less than 10^{-2} A cm $^{-2}$ M $^{-1}$), an order of magnitude decrease in sensitivity could be traded for stability, while the currents remained high enough to be easily measured.

As seen in Fig. 5, the sensitivity of the stabilized sensors does not change by more than $\pm 5\%$ for 72 hours of operation at 37°C. After a small initial decrease in sensitivity, it increased to a maximum after 40 hours and the final 72 hour sensitivity was almost identical with the initial.

The characteristics of the electrodes of the present invention are summarized in Table 1. Each entry represents an average value for five tested electrodes. Baseline currents are typically less than 0.5 nA and the noise less than 10 pA. The currents observed throughout the physiological glucose concentration range (2-20 mM) exceed the noise equivalent current by at least a factor of 100. The apparent K_m is 20 mM, and the 10% to 90% response time is, for aged electrodes, about 90 seconds at the lowest physiologically relevant glucose concentration (2 mM) and 20 seconds at the highest (20 mM).

The baseline of nil at 0 mM glucose is stable for 36 hours in the presence of 0.1 mM ascorbate. The

stability observed and the existence of a valid zero-point in the presence of interferants suggest that the sensor can be used *in vivo* for 72 hours and tested/recalibrated *in vivo* through a single point calibration, i.e., by withdrawing only a single sample of blood for independent analysis.

TABLE 1

SENSOR CHARACTERISTICS					
i (nA)	j ($\mu\text{A}/\text{cm}^2$)	K_M^{app} (mM) EH	K_M^{app} (mM) LB	t_r (s)	Current Variance (%)
33.9	69.1	18.5	33.4	30-90	5.0

where :

- i is the current measured at 37°C and at 10 mM glucose concentration
- j is the current density measured at 37°C at 10 mM glucose concentration
- K_M^{app} is the apparent Michaelis-Menten coefficient determined from an electrochemical Eadie-Hoffstee (EH) or Lineweaver-Burk (LB) plot
- t_r is the 10-90% risetime, 90s for 2 mM and 30 s for 20 mM glucose concentration.
- Current Variance is the maximum deviation from the mean value, measured during the 72 hour test, conducted in 10 mM glucose in the presence of interferants. The current was continuously monitored at 37°C.

The foregoing examples are designed to illustrate certain aspects of the present invention. The examples are not intended to be comprehensive of all features and all embodiments of the present invention, and should not be construed as limiting the claims presented herein.

35

WE CLAIM:

1 1. An electrode comprising:
2 a non-corroding, conducting wire coated with
3 an insulating polymer;
4 a recess at one end of said coated wire,
5 forming a channel in the insulating polymer coat devoid
6 of wire and bounded at one end by the wire and at an
7 opposite end by the environment adjacent the coated
8 wire;
9 a multilayered polymeric composition within
10 \ said channel, the composition comprising:
11 a redox layer adjacent to and contacting
12 said wire, the redox layer comprising a redox enzyme
13 crosslinked to a redox polymer;
14 a biocompatible polymer layer adjacent to the
15 environment outside the coated wire; and
16 an analyte diffusion limiting barrier layer
17 positioned between said redox layer and said
18 biocompatible layer.

1 2. A method for producing an in vivo glucose
2 biosensor comprising the steps of:
3 coating a non-corroding metal or carbon wire
4 with a bio-compatible insulating polymer containing less
5 than 5% water when in equilibrium with physiological
6 body fluids to form a coated wire;
7 etching said coated wire to form a recess at
8 one end of said coated wire, said recess devoid of
9 metal or carbon;
10 immobilizing within said recess, adjacent to
11 said wire, a redox composition comprising glucose
12 oxidase and a redox polymer;

13 overcoating contents of the recess with a
14 biocompatible polymer;
15 wherein said etched wire with said polymer
16 overcoated recess and contents form a glucose biosensor
17 having substantially no current output at zero glucose
18 concentration, even in the presence of interfering
19 eletroreactive species.

1 3. A method for measuring glucose
2 concentration in an animal comprising the steps of:
3 implanting subcutaneously in an animal the
4 electrode of claim 1;
5 placing a second reference counter or
6 combined reference and counter electrode on or in the
7 skin of the animal;
8 connecting the electrodes through an
9 electrical circuit; and
10 obtaining readings to measure glucose
11 concentration.

1 4. The method of claim 3, wherein at least
2 two electrodes of claim 1 are implanted subcutaneously
3 in said animal, and wherein paired readings of said two
4 electrodes that do not differ more than two standard
5 deviations are accepted as correctly measuring the
6 concentration of glucose.

1 5. A biosensor comprising:
2 a non-corroding metal or carbon electrode;
3 a sensing layer adjacent to and in electrical
4 contact with the electrode, the sensing layer
5 comprising a redox polymer and a redox enzyme;

6 a biocompatible layer coating an outer
7 surface of the electrode and sensing layer and adjacent
8 to an environment outside the sensor, said
9 biocompatible layer comprised of a biocompatible
10 polymer containing not less than 20% water by weight
11 when in equilibrium with physiological body fluids.

1 6. The biosensor of claim 5, wherein said
2 electrode is part of an electrically conducting wire.

1 7. The biosensor of claim 1, wherein said wire is
2 coated along its length, but not at its tip, with an
3 electrically insulating polymer containing less than 5%
4 water by weight when in equilibrium with physiological
5 body fluids.

1 8. The biosensor of claim 7, wherein said tip of
2 the wire is recessed in the insulating polymer coat,
3 forming a recessed channel having a length from tip of
4 the sensor to the recessed wire of between
5 approximately 20 μm and 1 mm.

1 9. The biosensor of claim 8, wherein said redox
2 polymer is derived from poly(1-vinylimidazole) or a
3 copolymer of (1-vinyl imidazole) bound to a metal ion
4 selected from the group consisting of $\text{Os}^{3+/2+}$, $\text{Ru}^{3+/2+}$, and
5 $\text{Fe}^{3+/2+}$.

1 10. The biosensor of claim 1, wherein the redox
2 potential of said redox polymer is not more reducing
3 than about -0.15V and not more oxidizing than about
4 +0.15V versus the standard calomel electrode in an
5 aqueous solution at about pH 7.4.

1 11. The biosensor of claim 1 further comprising
2 an interference eliminating layer comprising a
3 peroxidase enzyme.

1 12. The biosensor of claim 1, wherein said redox
2 enzyme catalyzes the oxidation of glucose.

1 13. The biosensor of claim 12, wherein said redox
2 enzyme is glucose oxidase.

1 14. The biosensor of claim 13, wherein said redox
2 enzyme is recombinant glucose oxidase.

1 15. The biosensor of claim 1, wherein said redox
2 enzyme catalyzes the oxidation of lactate.

1 16. The biosensor of claim 11, wherein said
2 interference eliminating layer further comprises an
3 enzyme which catalyzes a hydrogen peroxide-generating
4 reaction.

1 17. The biosensor of claim 7, wherein said
2 insulating polymer is selected from the group
3 consisting of polyimide, polyester, polyurethane, and
4 perfluorinated polymer.

1 18. The biosensor of claim 1, further comprising
2 a glucose flux limiting layer positioned between said
3 sensing layer and said biocompatible layer, the glucose
4 flux limiting layer comprising a polyanionic,
5 polycationic, or zwitterionic polymer.

1 19. The biosensor of claim 1 wherein the outside
2 diameter of the insulated wire is less than about
3 0.3mm.

1 20. The biosensor of claim 1 wherein the redox
2 enzyme and redox polymer are crosslinked.

1 21. A method for manufacturing the biosensor of
2 claim 6, comprising the steps of:
3 electrically charging droplets of an aqueous
4 polymer;
5 applying a potential to the electrode such that
6 the electrically charged droplets are attracted to said
7 electrode; and
8 applying the charged droplets of polymer to the
9 electrode to form a polymer coated electrode.

1 22. The method of claim 21, wherein the
2 electrically charged droplets are applied to a non-
3 insulated tip of an electrically insulated wire.

1 23. A method for manufacturing the biosensor of
2 claim 1, wherein said recessed channel is formed by
3 electrolytic dissolution of part of the electrically
4 conducting wire, with an oxidizing electrical potential
5 of not less than 0.3 volts versus the standard calomel
6 electrode being maintained on the dissolving wire, said
7 wire being immersed in an aqueous solution containing
8 at least one anion selected from the group consisting
9 of CN^- , Cl^- , Br^- , and I^- at a concentration of at least
10 approximately 0.1M.

1 24. A method for measuring the concentration of a
2 biochemical in an animal comprising:

3 contacting body fluid of an animal the electrode
4 of claim 1; and

5 determining from the electrical signal generated
6 at the electrode the concentration of biochemical in
7 the body fluid.

1 25. The method of claim 25, wherein said
2 contacting is implanting the electrode subcutaneously.

1 26. The method of claim 25, wherein said
2 subcutaneous tissue is blood.

1 27. The method of claim 24, wherein said
2 biochemical is glucose.

1 28. The method of claim 24, wherein said
2 biochemical is lactate.

1 29. The method of claim 24, wherein at least two
2 electrodes are simultaneously implanted and wherein
3 their readings are compared and accepted as valid only
4 when they do not differ by more than two standard
5 deviations, the standard deviations being calculated
6 from paired measurements with a pair of implanted
7 electrodes.

1 30. A method for calibrating the implanted
2 electrode of claim 1, comprising the steps of:
3 analyzing the concentration of the analyte to be
4 measured by the electrode of claim 8 in one or more
5 samples of fluid withdrawn from a patient, where the
6 concentration of the chemical does not change
7 substantially in the withdrawn samples;

8 relating the current generated by the electrode at
9 the time the sample is withdrawn to the concentration
10 of biochemical.

002260" T 223950

ABSTRACT

- A small diameter flexible electrode designed for subcutaneous *in vivo* amperometric monitoring of glucose is described. The electrode is designed to allow "one-point" *in vivo* calibration, i.e., to have zero output current at zero glucose concentration, even in the presence of other electroreactive species of serum or blood. The electrode is preferably three or four-layered, with the layers serially deposited within a recess upon the tip of a polyamide insulated gold wire.
- 5
 - 10、 A first glucose concentration-to-current transducing layer is overcoated with an electrically insulating and glucose flux limiting layer (second layer) on which, optionally, an immobilized interference-eliminating horseradish peroxidase based film is
 - 15 deposited (third layer). An outer (fourth) layer is biocompatible.

002250 " 1228950

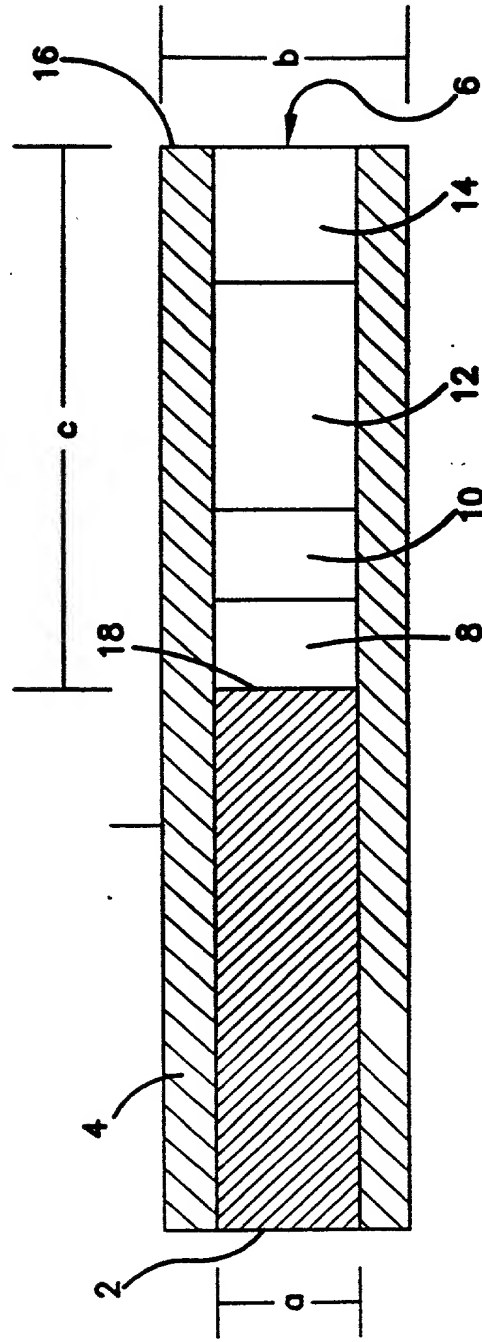


FIG. 1

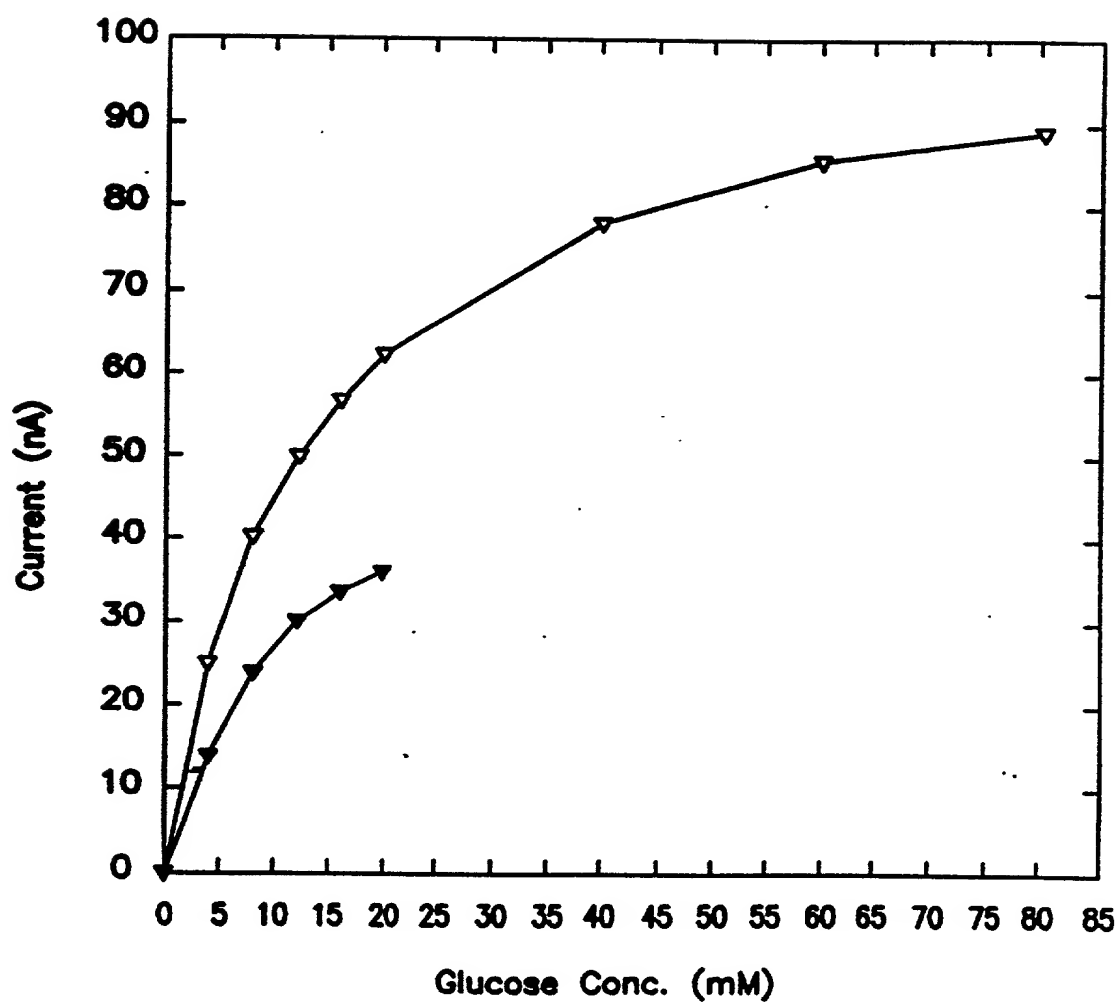


FIG. 2

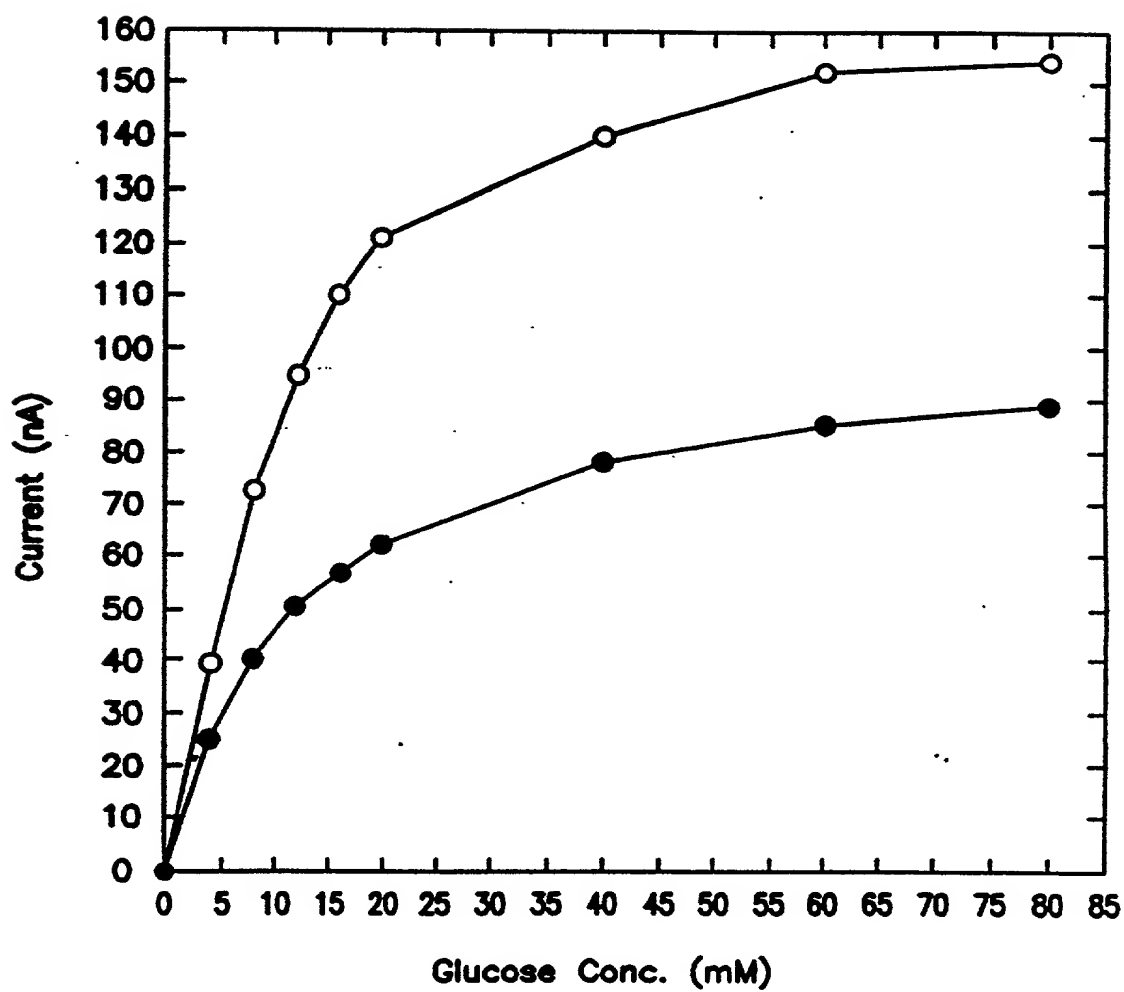


FIG. 3

002250-12289560

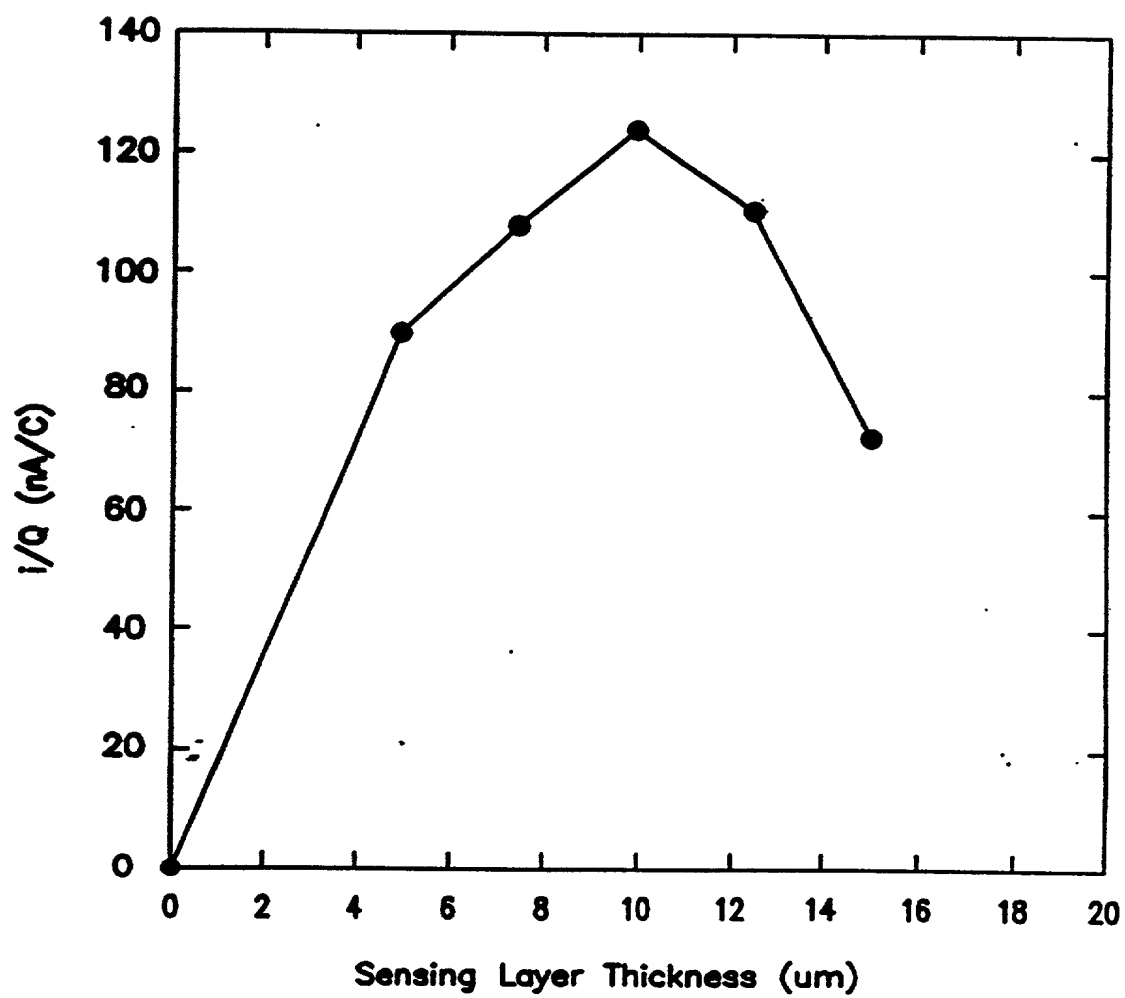


FIG. 4

002260" T2229150

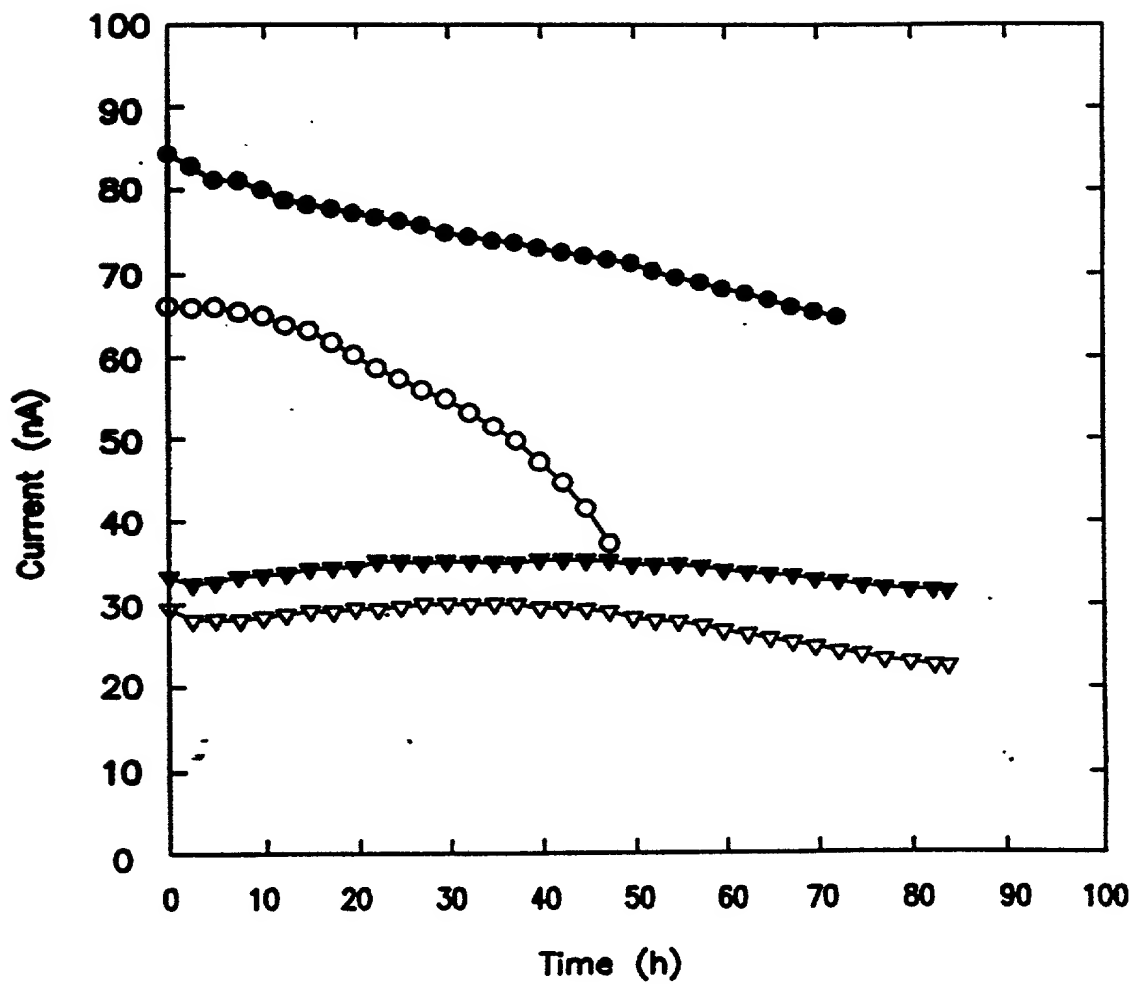


FIG. 5

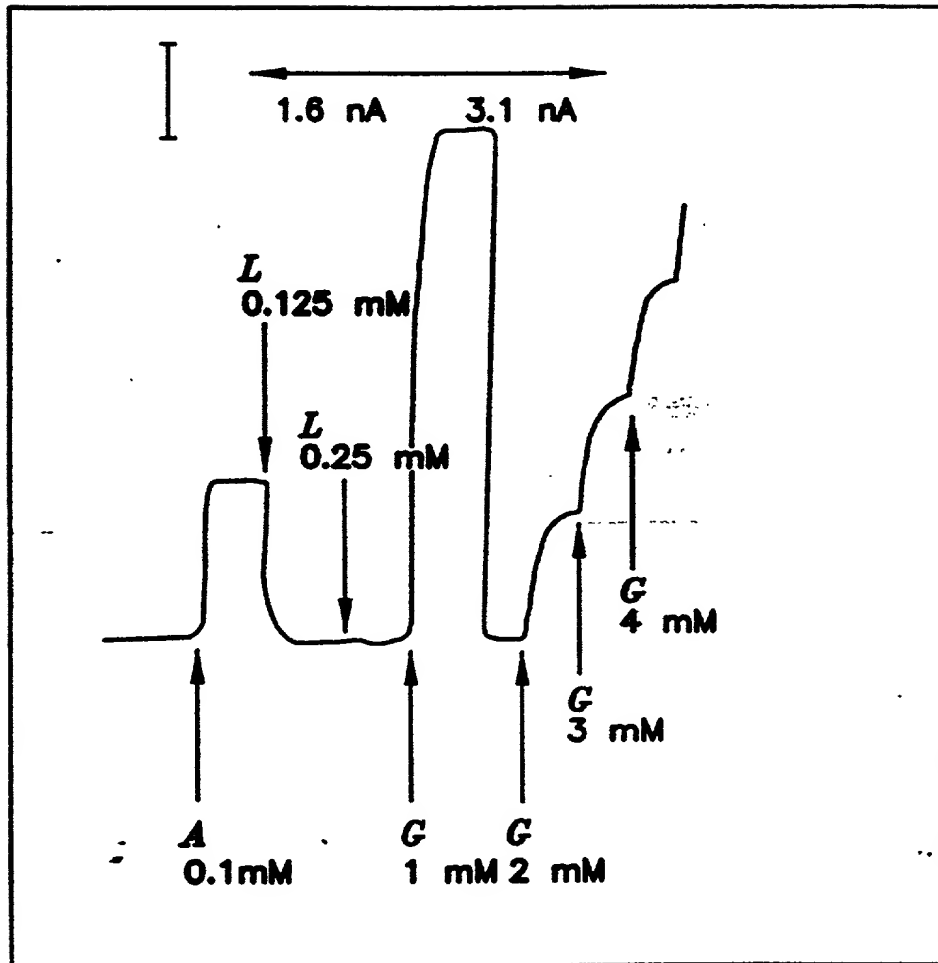


FIG. 6

002260-12289950

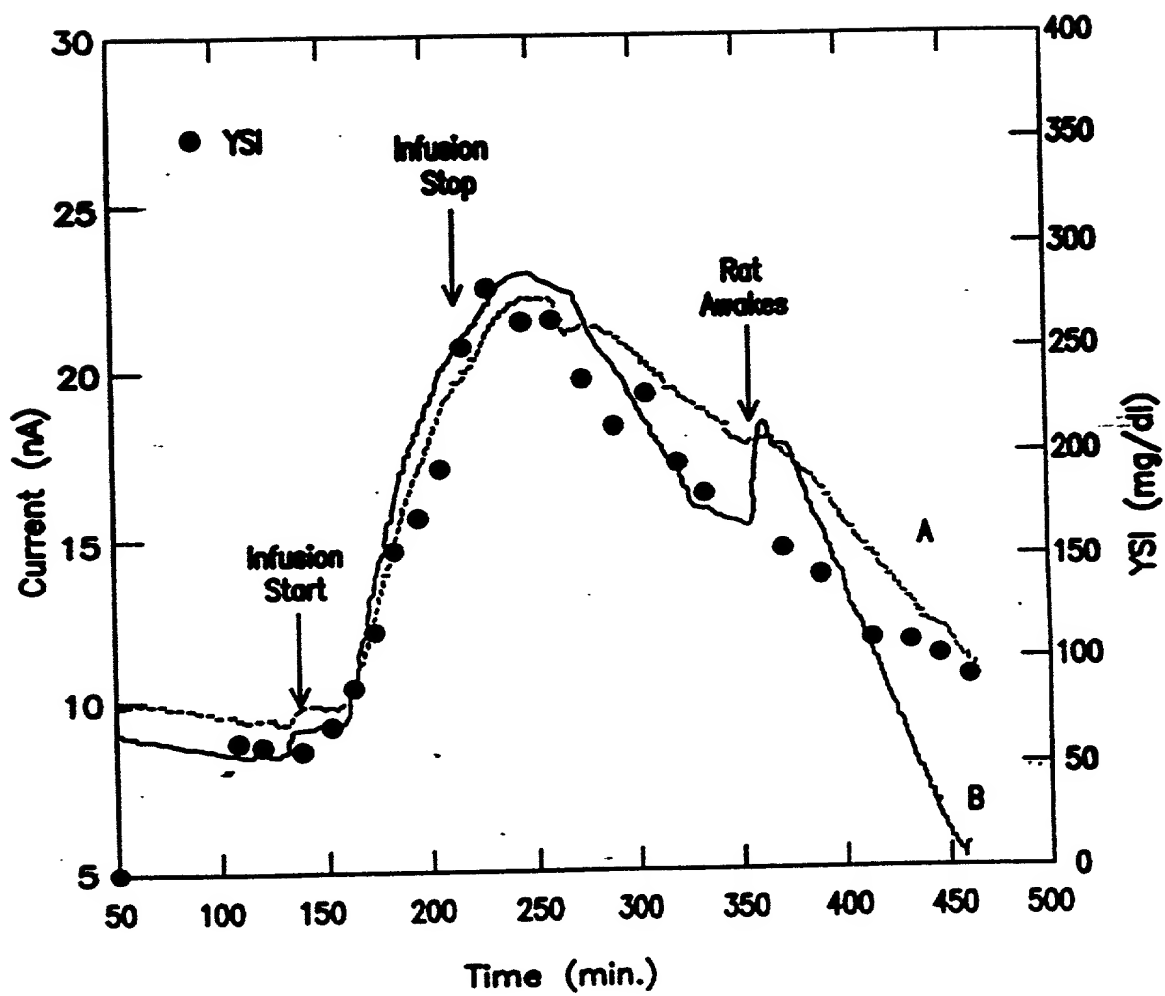


FIG. 7

002260" F228960

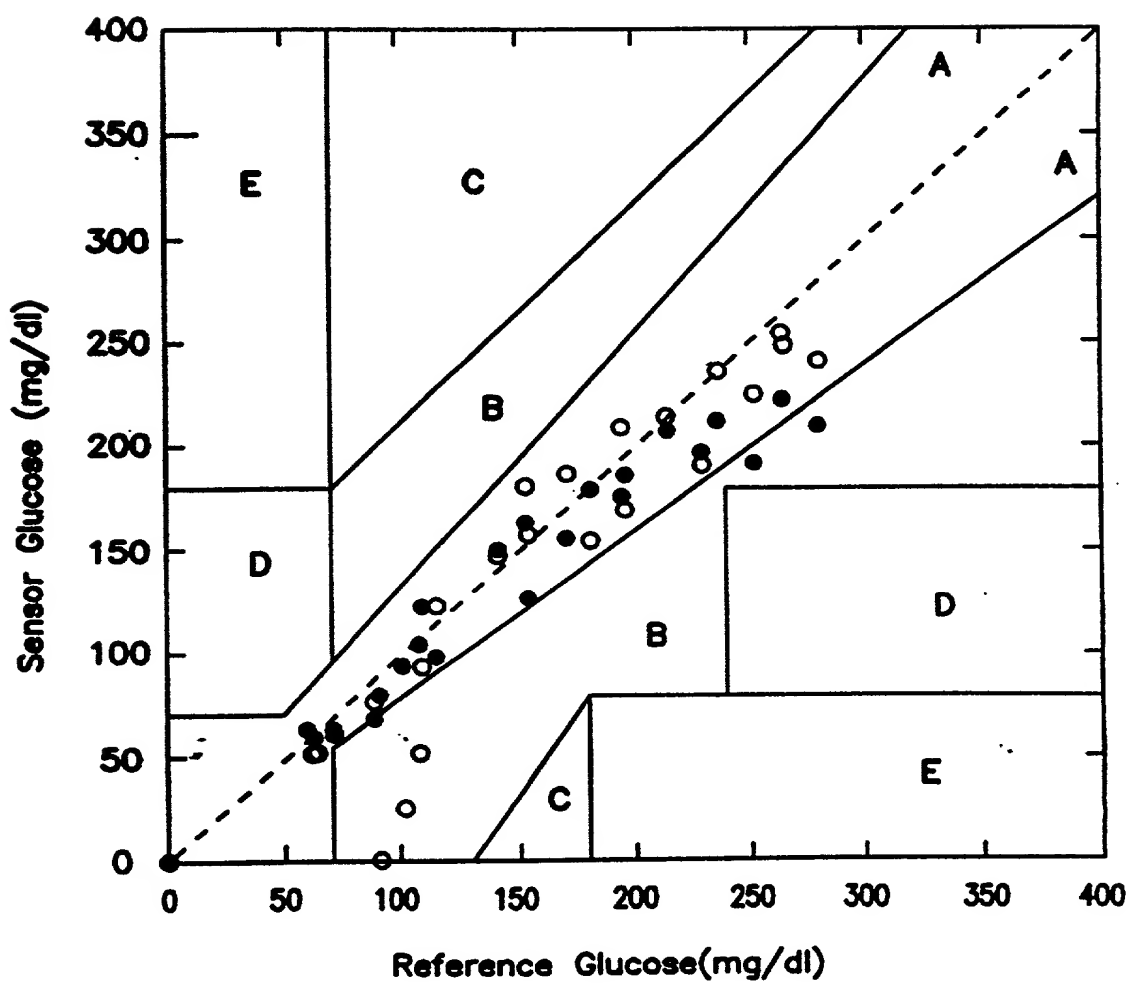


FIG. 8

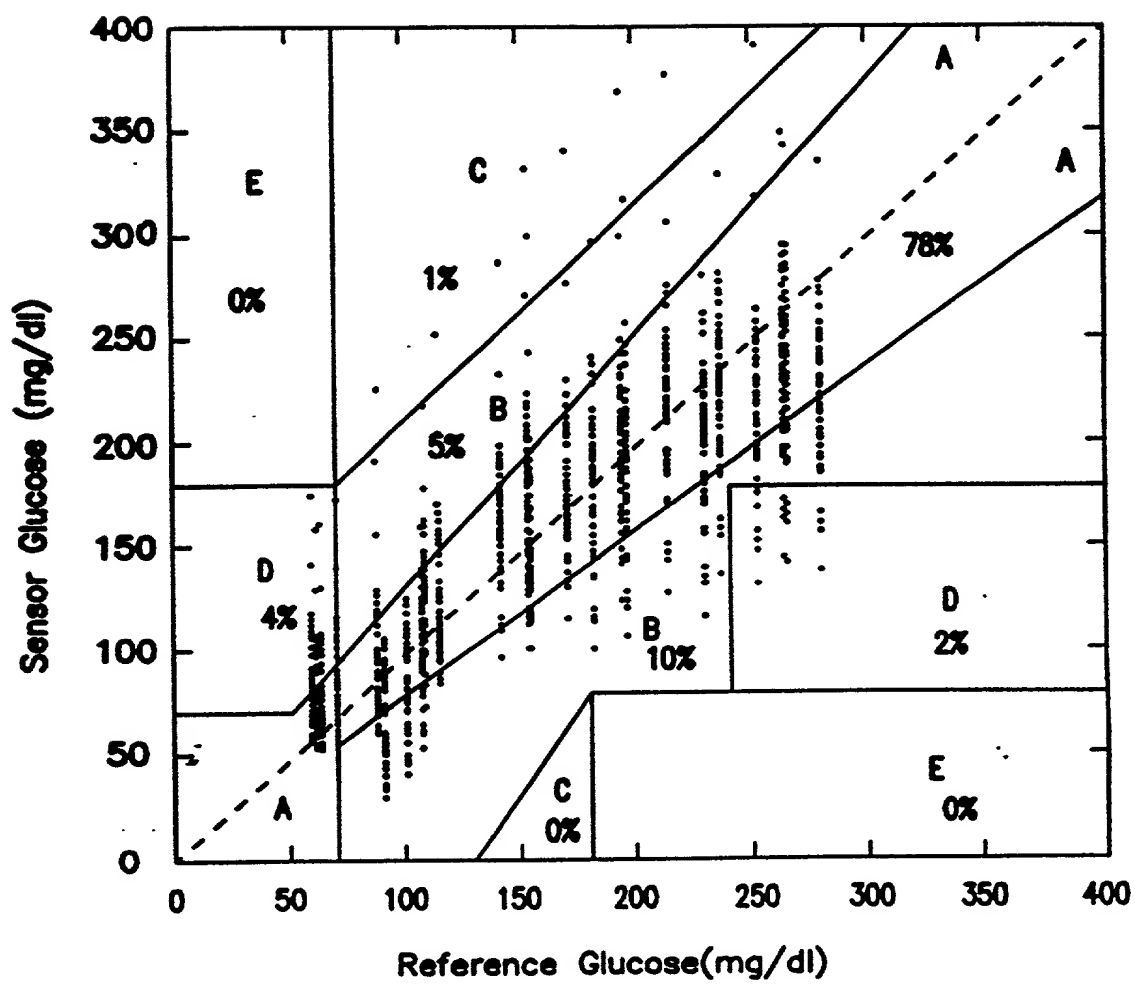


FIG. 9

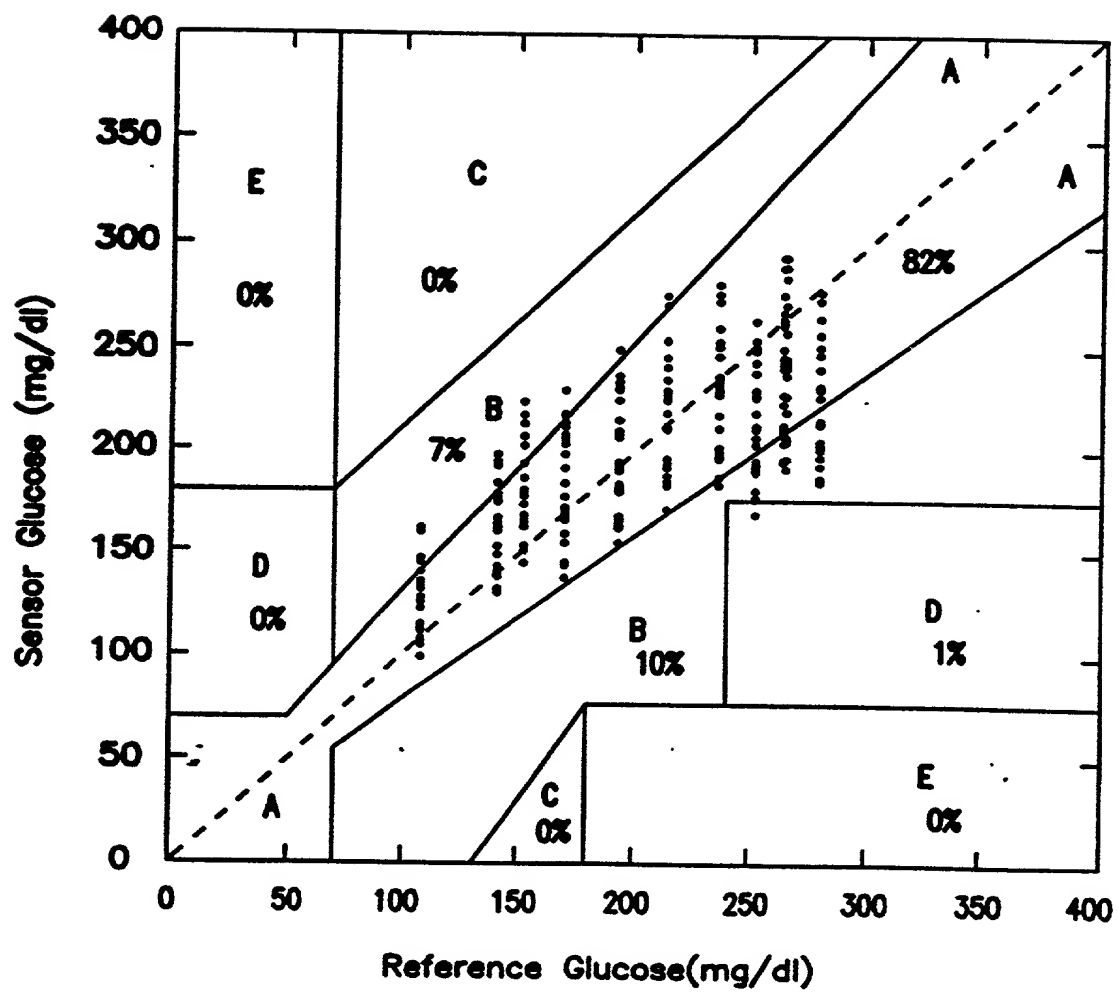


FIG. 10

Attorney Docket No. A94240US

DECLARATION

SOLE/JOINT INVENTOR
ORIGINAL/SUBSTITUTE/CIP

As a below named inventor, I hereby declare that: my residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SUBCUTANEOUS GLUCOSE ELECTRODE

as described in the specification [] attached or [X] of patent Application Serial No. 08/299,526 filed 9/1/94 and amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application; that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months prior to this application; and that I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations § 1.56(a). Such information is material when it is not cumulative to information already of record or being made of record in the application, and

- (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) it refutes, or is inconsistent with, a position the applicant has taken or may take in:
 - (i) opposing an argument of unpatentability relied on by the Office, or
 - (ii) asserting an argument of patentability.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificates listed below and have also identified below any foreign application(s) having a filing date before that of the application(s) on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35 United States Code § 120 of any United States application(s) listed below and, insofar as any subject matter of any claim of this application is not disclosed in the prior United States Application, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application and the national PCT international filing date of this application:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Adam Heller	INVENTOR'S SIGNATURE <i>Adam Heller</i>	DATE October 18, 94
RESIDENCE Austin, Texas		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 5317 Valburn Circle, Austin, Texas 78731		
FULL NAME OF SECOND JOINT INVENTOR Michael V. Pishko	INVENTOR'S SIGNATURE <i>Michael V. Pishko</i>	DATE 10/18/94
RESIDENCE Austin, Texas		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 4324 C. Duval Road, Austin, Texas 78759		
FULL NAME OF THIRD JOINT INVENTOR, IF ANY	INVENTOR'S SIGNATURE	DATE
RESIDENCE		CITIZENSHIP
POST OFFICE ADDRESS		

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant/Patentee:

ADAM HELLER
MICHAEL V. PISHKO

Filed/Issued: 9/1/94

Serial No./Pat. No.: 08/299,526

For: SUBCUTANEOUS GLUCOSE ELECTRODE

§
§
§
§
§
§
§
§
§
§

Group Art Unit:

Examiner:

Atty File: A94240US

POWER OF ATTORNEY BY INVENTOR

As a named inventor, I hereby revoke all previous powers of attorney and appoint the following to conduct the prosecution of this application/maintenance of the patent and transact all business in the Patent and Trademark Office connected therewith:

Denise M. Kettelberger, Reg. No. 33,924 Jan K. Simpson, Reg. No. 33,283
John Wilson Jones, Reg. No. 31,380
Paul E. Krieger, Reg. No. 25,886
Albert B. Kimball Jr., Reg. No. 25,689

Please direct all communications to: PRAVEL, HEWITT, KIMBALL & KRIEGER, 1177 West Loop South, 10th Floor, Houston, Texas 77027-9095, (713) 850-0909, FAX: (713) 850-0165, to the attention of: Denise M. Kettelberger.

Adam Heller
TYPED NAME: Adam Heller

DATE: October 18, 1994

Michael V. Pishko
TYPED NAME: Michael V. Pishko

DATE: 10/18/94

TYPED NAME: _____

DATE: _____

TYPED NAME: _____

DATE: _____